



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

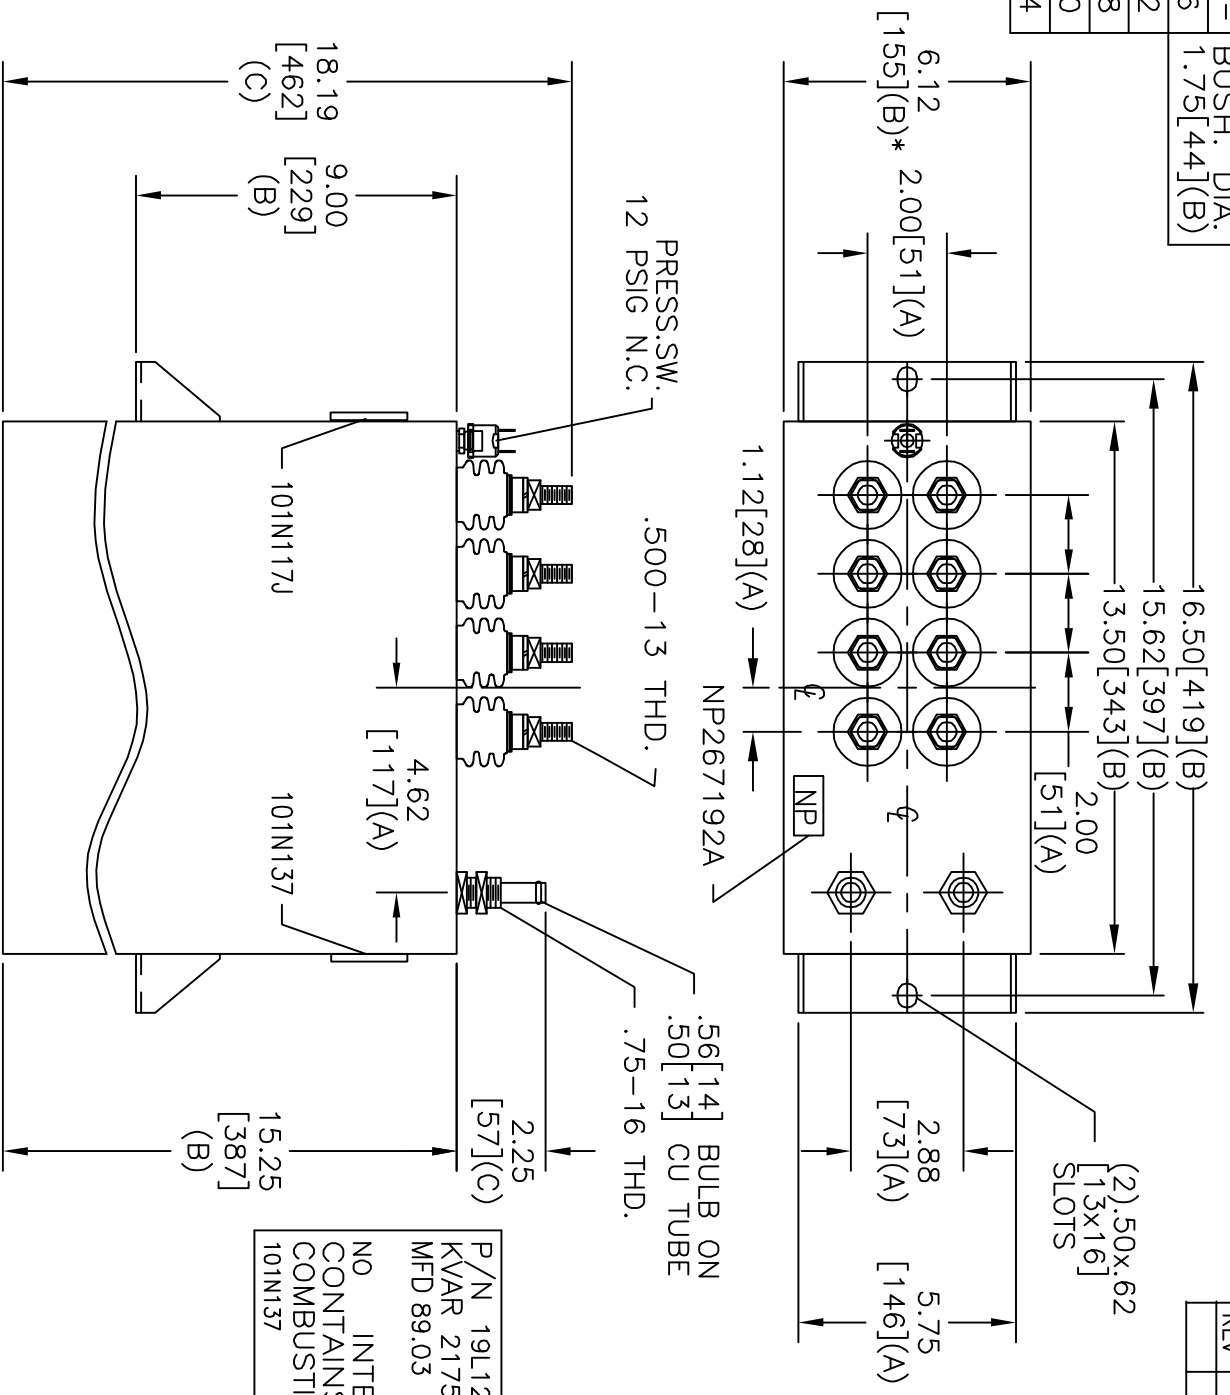

SIZE	DWG NO	SHT	REV
A	19L1253WB4	2	
REV	DESCRIPTION	DATE	APPROVED

TERM	UF	KVAR
1	11.13	271.88
2	11.13	271.88
3	11.13	271.88
4	11.13	271.88
5	11.13	271.88
6	11.13	271.88
7	11.13	271.88
8	11.13	271.88

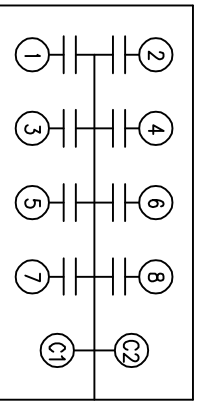

SCHEMATIC DIAGRAM - 801

P/N 19L1253WB4 SER. NO. 1800 HZ 1200
 KVAR 2175 VOLTS # TAPS 8 MFD/TAP 11.13
 MFD 89.03
 NO INTERNAL DISCH RESISTORS
 CONTAINS 2.25 GAL. NO PCB
 COMBUSTIBLE FLUID. OSHA CLASS III-B
 101N137

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS
FORT EDWARD, N.Y., U.S.A.

DRAWN B. ROSS
 DATE 9/17/04

ISSUED
 DATE 9/22/04

SIZE **A**

OUTLINE
19L1253WB4

SHEET 2 CONT ON -