



TOL	+/-	BUSH. DIA.
A	.06	1.75[.44](B)
B	.12	
C	.18	
D	.50	
E	.04	

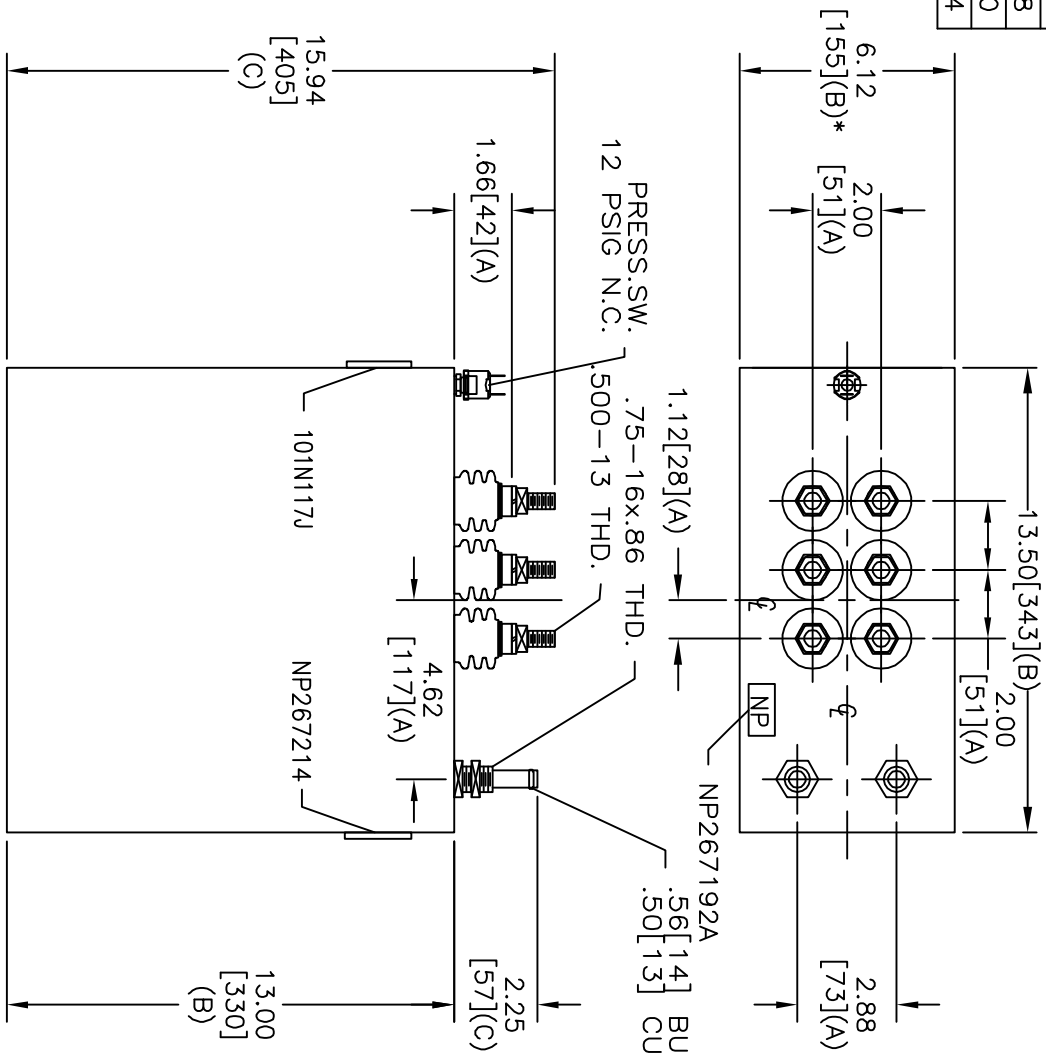

SIZE	DWG NO	SHT	REV
A	19L1254WH4	1	
REV	DESCRIPTION	DATE	APPROVED
			BTR

TERM	UF	KVAR
1	22.64	266.7
2	22.64	266.7
3	22.64	266.7
4	22.64	266.7
5	22.64	266.7
6	22.64	266.7

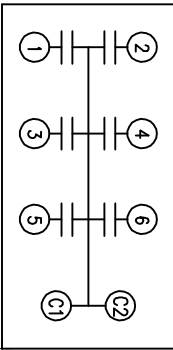

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS
 CAT. 19L1254WH4 SN
 1600KVAR 1250V 1200HZ 1PH
 6x22.64 UF/TAP
 1.66 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS
 FORT EDWARD, N.Y., U.S.A.

DRAWN B. ROSS
 DATE Sep 17, 2004

ISSUED
 DATE

SIZE **A**

SCALE

OUTLINE
 19L1254WH4

SHEET 2 CONT -

DISTR. TO