SIZE	DWG NO	SHT	REV
A	19L1256WP4	2	

REV	DESCRIPTION	DATE	APPROVED
			BTR

TOL	+/−
A	.06
B	.12
C	.18
D	.50
E	.04

BUSH. DIA.
1.75[44](B)

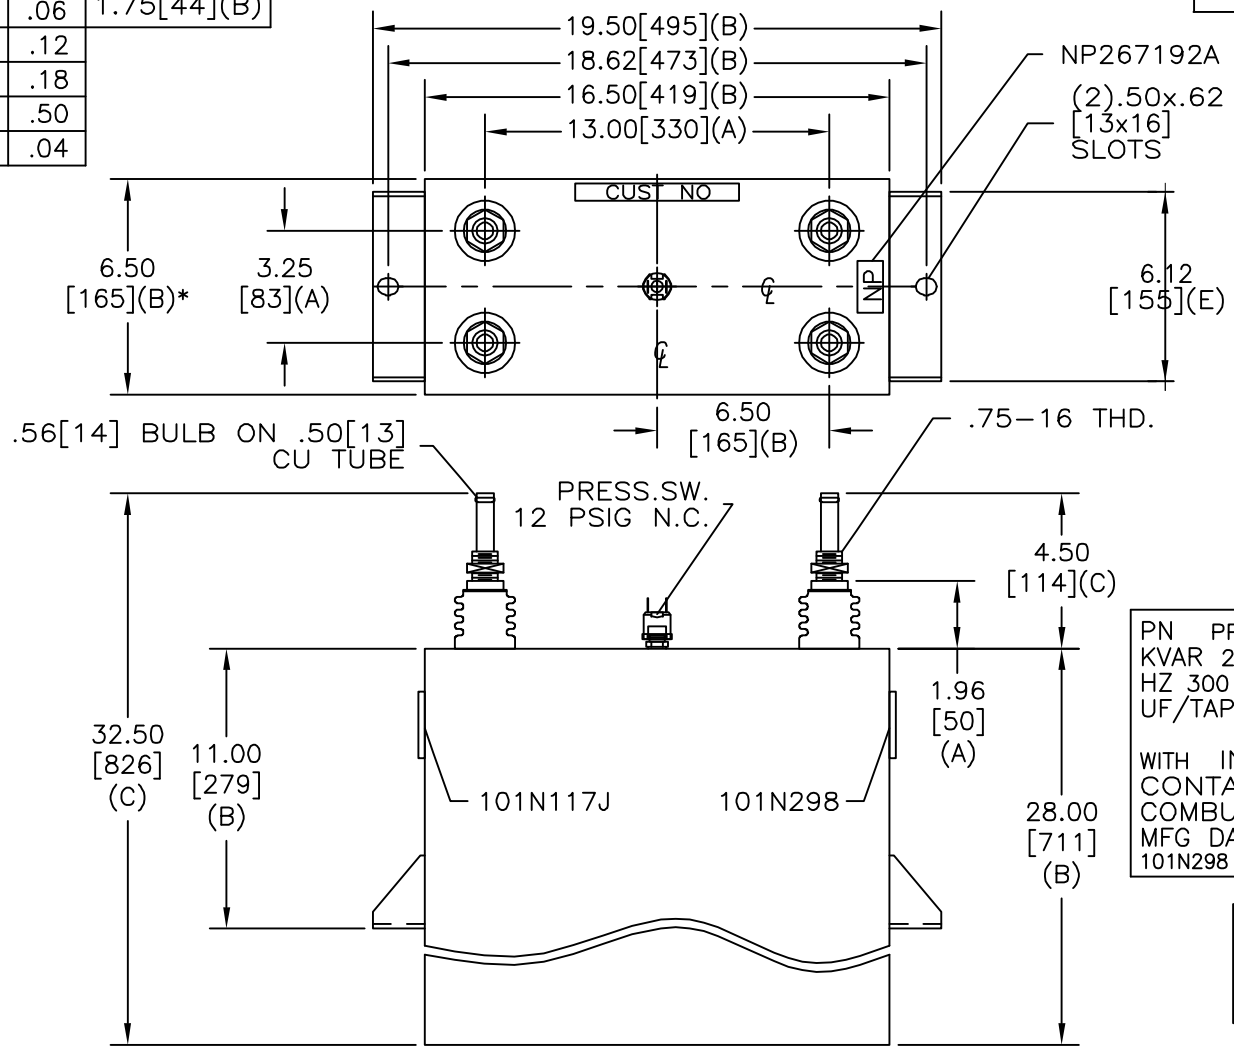

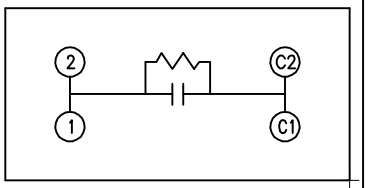

SCHEMATIC DIAGRAM − 107

PN PP 402−490 SER. NO.
KVAR 2610 VOLTS 2400
HZ 300 PH 1 NO.TAPS 1
UF/TAP 240.4

WITH INTERNAL DISCH RESISTORS
CONTAINS 4.00 GALS. NO PCB
COMBUSTIBLE FLUID OSHA CLASS III−B
MFG DATE
101N298 MADE IN USA

PILLAR INDUCTION COMPANY
PP 402−490

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT−LBS

NP267192A

INDUSTRIAL SYSTEMS
FORT EDWARD, N.Y., U.S.A.

DRAWN	B. ROSS	DATE	OCT 18, 2004
ISSUED		DATE	10/20/04

SIZE A

SCALE

OUTLINE
19L1256WP4

SHEET 2 CONT ON 3

DISTR. TO