


| | | | |
|-----------|----------------------|----------|----------|
| SIZE A | DWG NO 19L1260WH4 | SHT 2 | REV |
| REV | DESCRIPTION | DATE | APPROVED |


| TERM | uF | kVAR |
|------|------|--------|
| 1 | .601 | 428.57 |
| 2 | .601 | 428.57 |
| 3 | .601 | 428.57 |
| 4 | .601 | 428.57 |
| 5 | .601 | 428.57 |
| 6 | .601 | 428.57 |
| 7 | .601 | 428.57 |

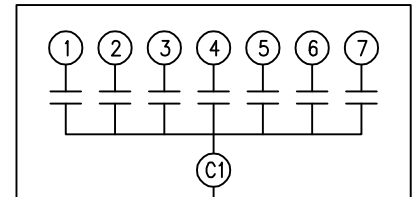

SCHEMATIC DIAGRAM - 716

NO INTERNAL DISCH RESISTORS
 CAT. 19L1260WH4 SN
 3000KVAR 1800V 35000HZ 1PH
 7x.601 UF/TAP
 2.20 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

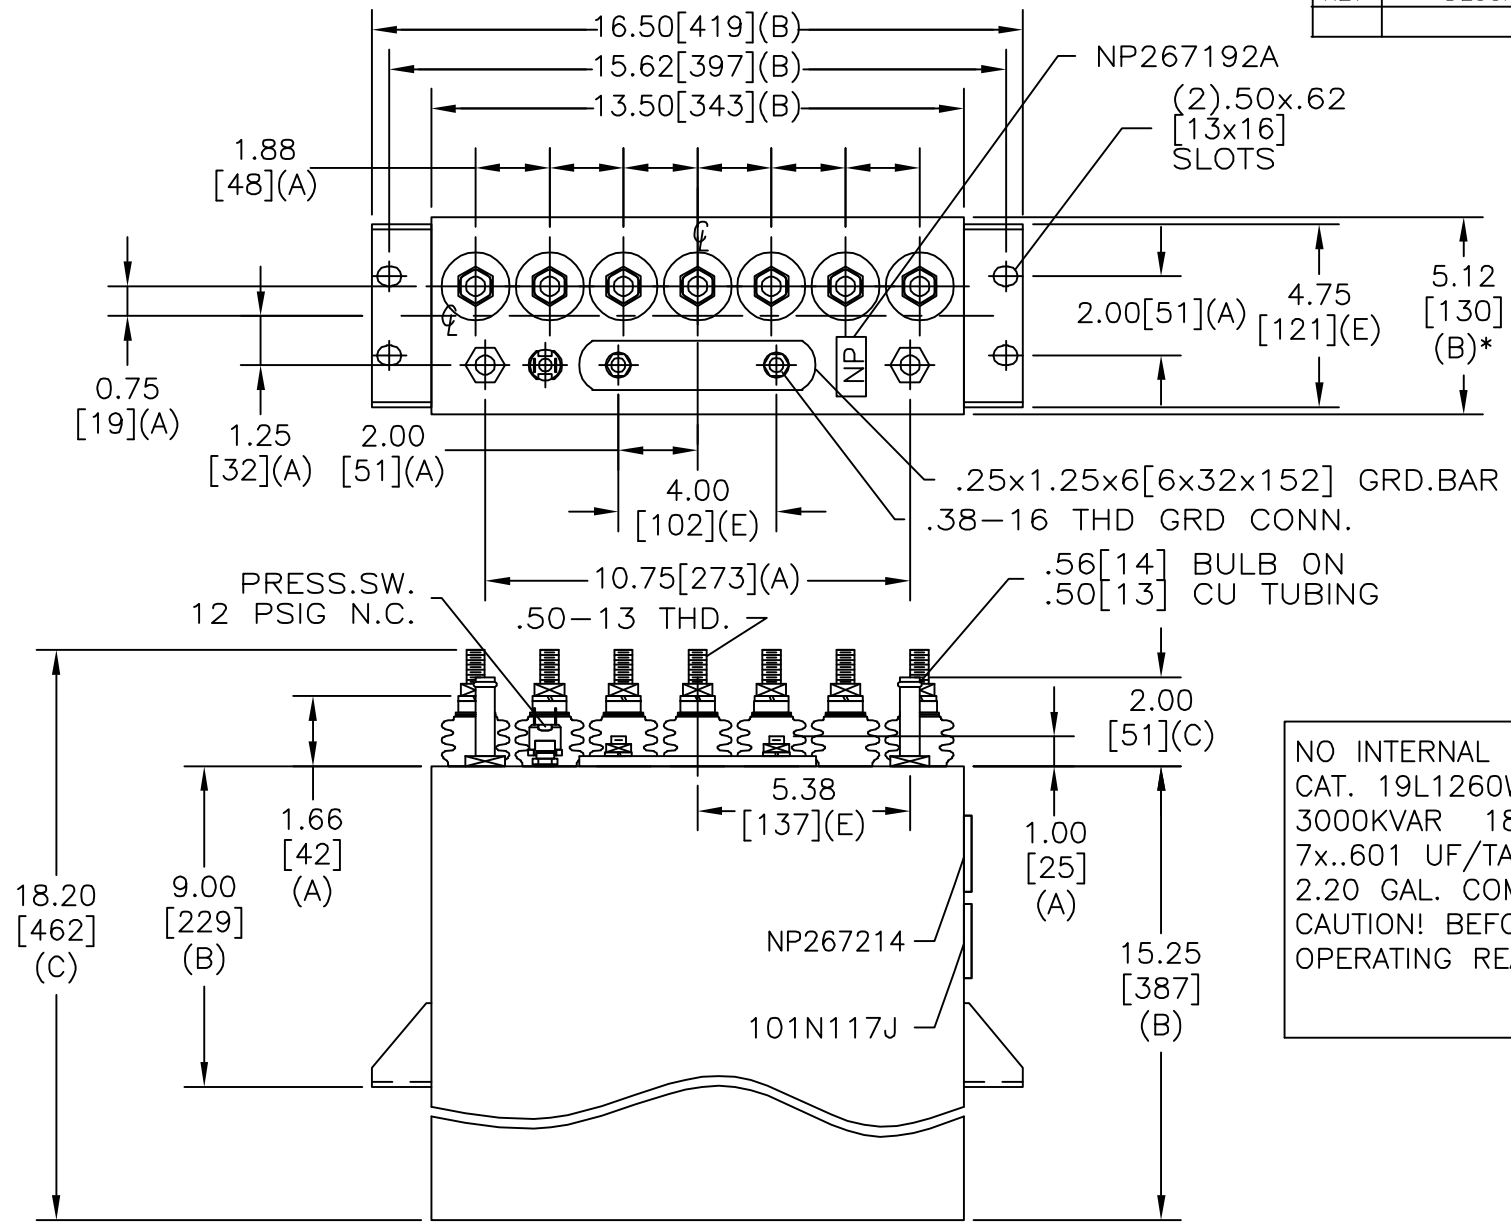

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

| | | |
|--|--------|-------------------|
| INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A. | | SIZE A |
| DRAWN | B.ROSS | DATE JAN 28, 2005 |
| ISSUED | | DATE |

| | | |
|--------------------------------------|--|-------------------|
| <h1>OUTLINE</h1> <h2>19L1260WH4</h2> | | SHEET 2 CONT ON - |
|--------------------------------------|--|-------------------|

DISTR. TO