



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

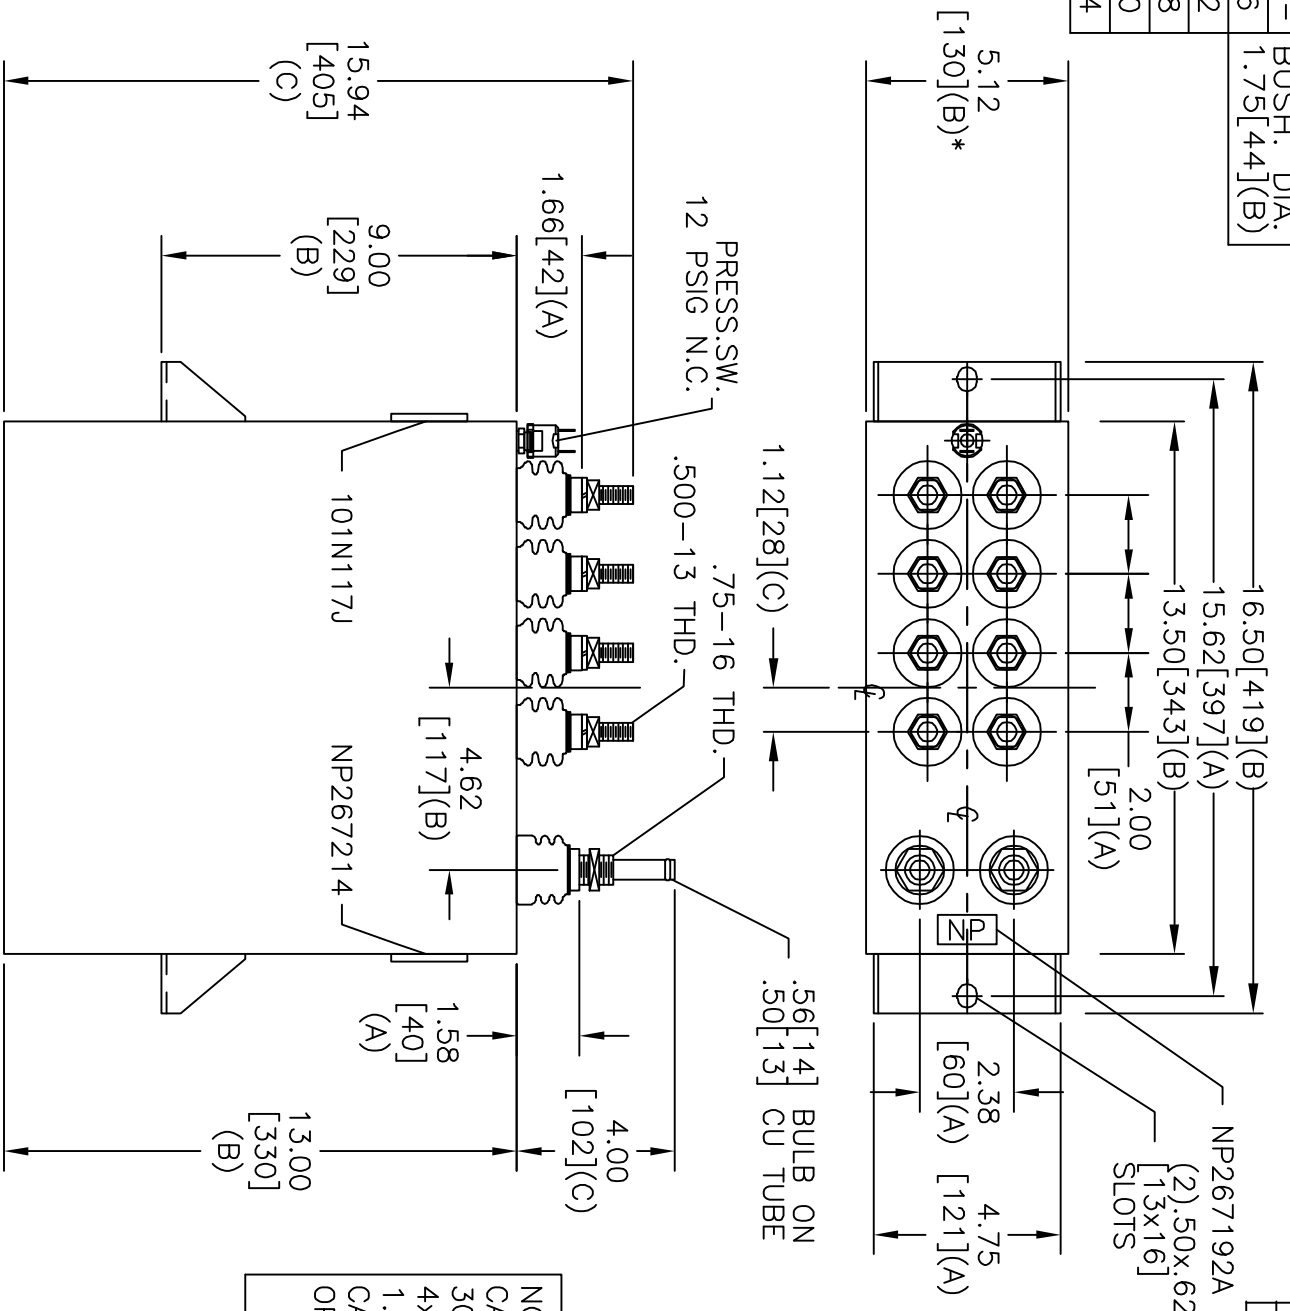

SIZE	DWG NO	SHT	REV
A	19L1262WH4	2	
REV	DESCRIPTION	DATE	APPROVED

TERM	UF	KVAR
1	3.32	250
2	3.32	250
3	3.32	250
4	3.32	250
5	6.63	500
6	6.63	500
7	6.63	500
8	6.63	500

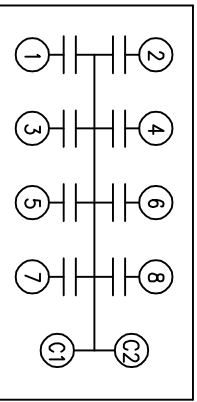

SCHEMATIC DIAGRAM - 800

NO INTERNAL DISCH RESISTORS  
 CAT. 19L1262WH4 SN  
 3000KVAR 2000V 3000HZ 1PH  
 4x3.32 + 4x6.63 UF/TAP  
 1.7 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733

NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A



INDUSTRIAL SYSTEMS  
 FORT EDWARD, N.Y., U.S.A.

DRAWN	B.ROSS	DATE	FEB 25, 2004
ISSUED		DATE	3/2/05

SIZE  
 A

OUTLINE  
 19L1262WH4

SHEET	2	CONT	ON
			-