
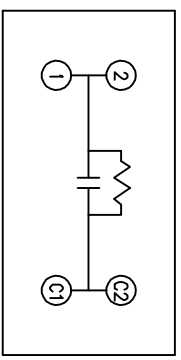


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

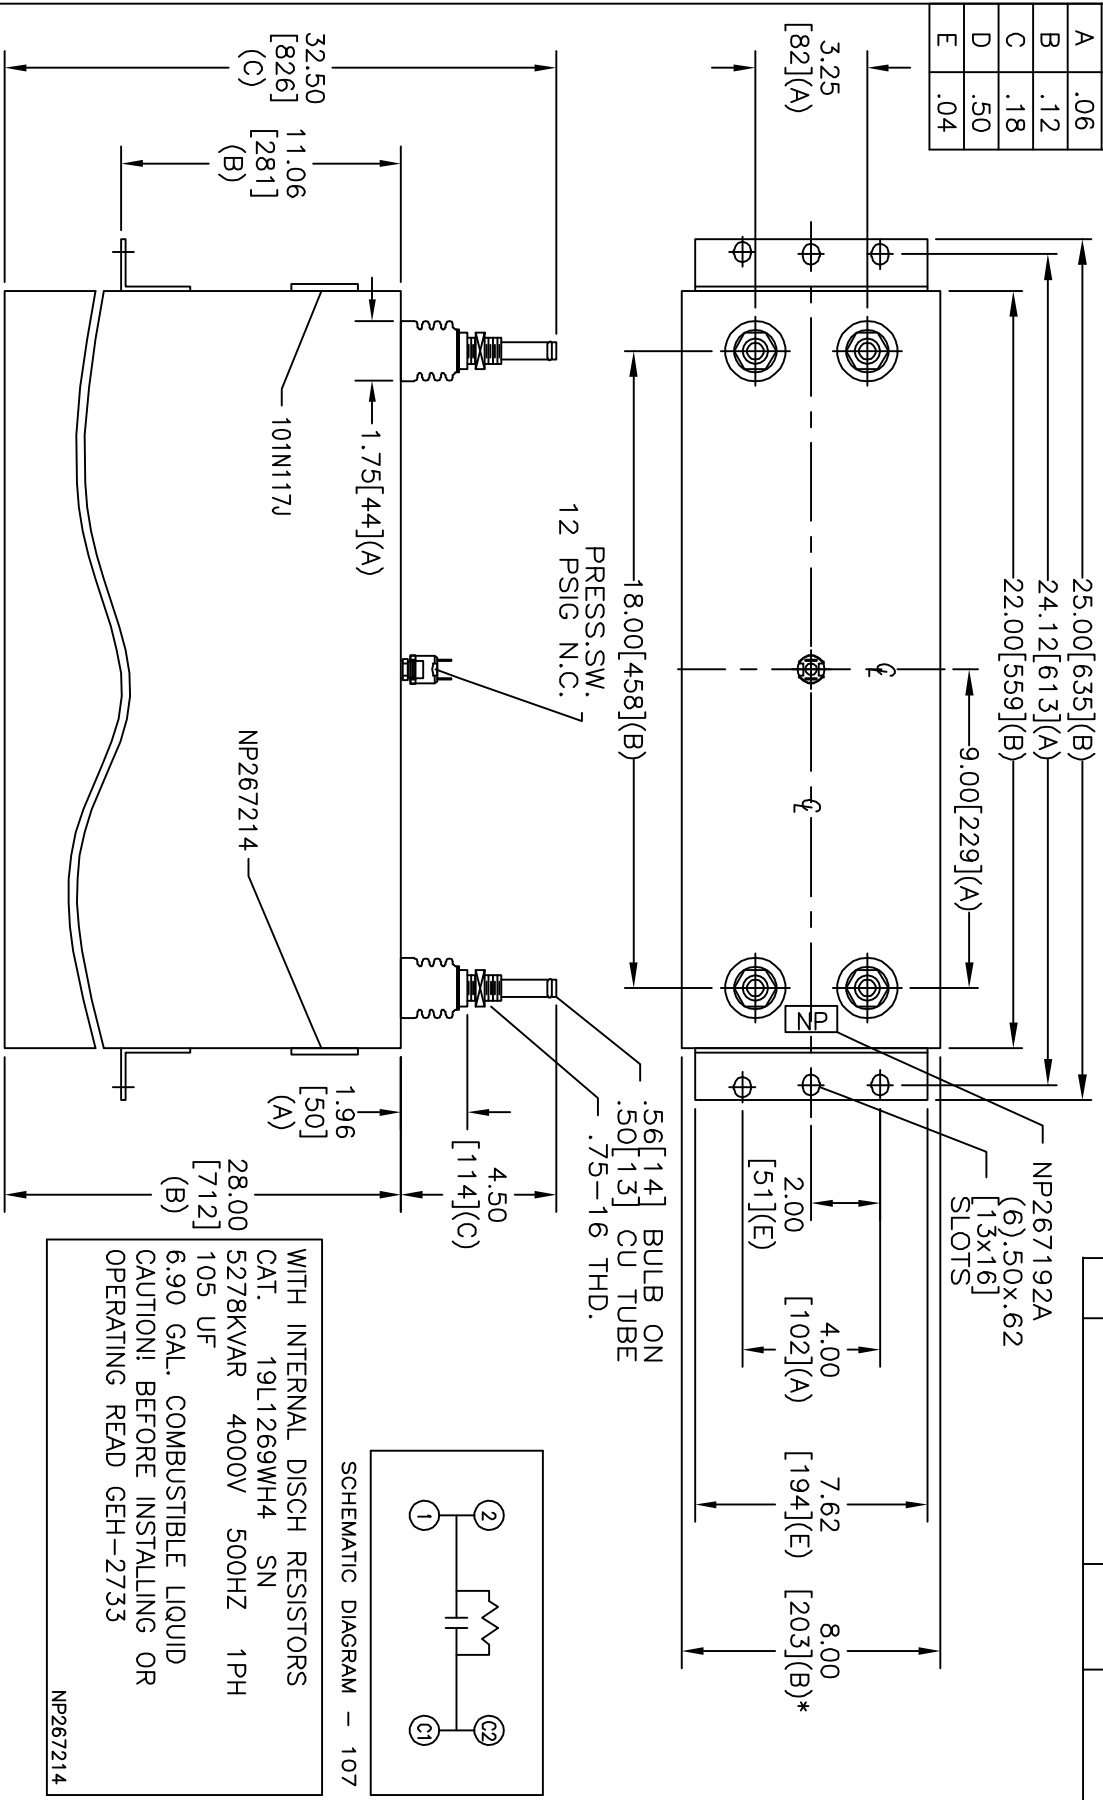

WITH INTERNAL DISCH RESISTORS  
 CAT. 19L1269WH4 SN  
 5278KVAR 4000V 500HZ 1PH  
 105 UF  
 6.90 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733

NP267214

\* UP TO +.75 [19]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

SIZE	DWG NO	SHT	REV
A	19L1269WH4	2	
REV	DESCRIPTION	DATE	APPROVED

**INDUSTRIAL SYSTEMS**  
 FORT EDWARD, N.Y., U.S.A.

DRAWN B. ROSS  
 DATE 11/17/2006

ISSUED  
 DATE

SIZE **A**

**OUTLINE**  
 19L1269WH4

SHEET 2 CONT 3