

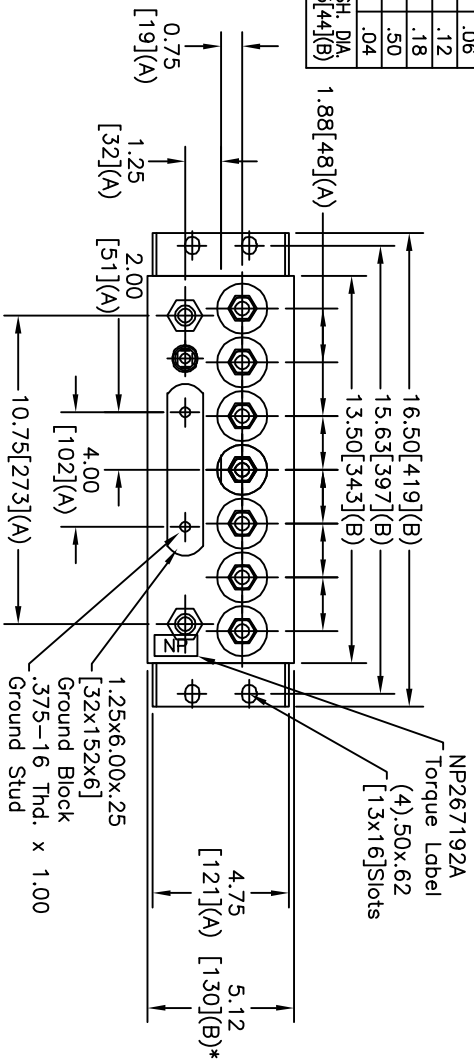


SIZE	DWG NO	SHT	REV
A	19L1277WH4	2	
REV	DESCRIPTION	DATE	APPROVED

TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04



TERM	UF	KVAR
1	0.91	457.14
2	0.91	457.14
3	0.91	457.14
4	0.91	457.14
5	0.91	457.14
6	0.91	457.14
7	0.91	457.14

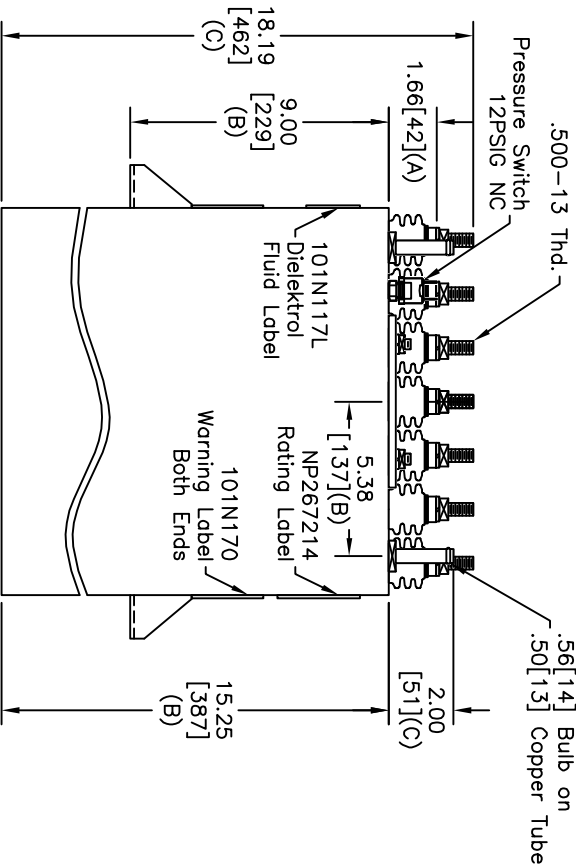

SCHEMATIC DIAGRAM - 716

NO INTERNAL DISCH RESISTORS  
 CAT. 19L1277WH4026 SN  
 3200KVAR 2000V 20000HZ 1PH  
 7x0.91UF/TAP  
 2.1 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 MADE IN USA NP267214

NOTES:  
 1. Maximum terminal tightening torque  
 .50-13 thd. 15 ft-lbs. 20.3 N-m  
 .75-16 thd. 25 ft-lbs. 33.9 N-m  
 2. Minimum water flow 1 GPM (3.8 l/m)

\* UP TO +.50 [13]  
 CASE BULGE  
 MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS.  
 NP267192A

GE ENERGY  
 FORT EDWARD, N.Y., U.S.A.

DRAWN B. ROSS  
 DATE 3/26/2008

ISSUED DATE 3/26/2008

SIZE A  
 SCALE W/C9  
 Est Weight 63 lbs.

OUTLINE  
 19L1277WH4

SHEET 2 CONT -

DISTR. TO