

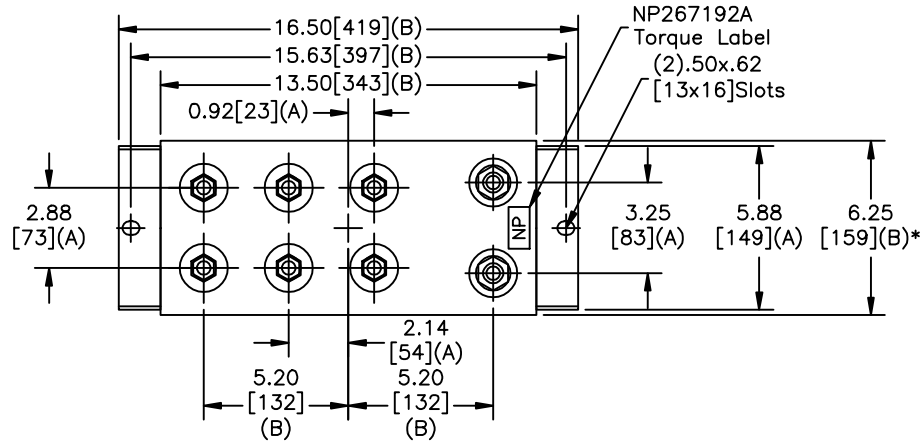


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH. DIA.	1.75[44](B)

SIZE A	DWG NO 19L1291WH3026	SHT 2	REV
REV 1	DESCRIPTION STD BRKTS	DATE 10/18/2010	APPROVED



TERM	uF	kVAR
1	68.20	30.2
2	68.20	30.2
3	68.20	30.2
4	68.20	30.2
5	68.20	30.2
6	68.20	30.2

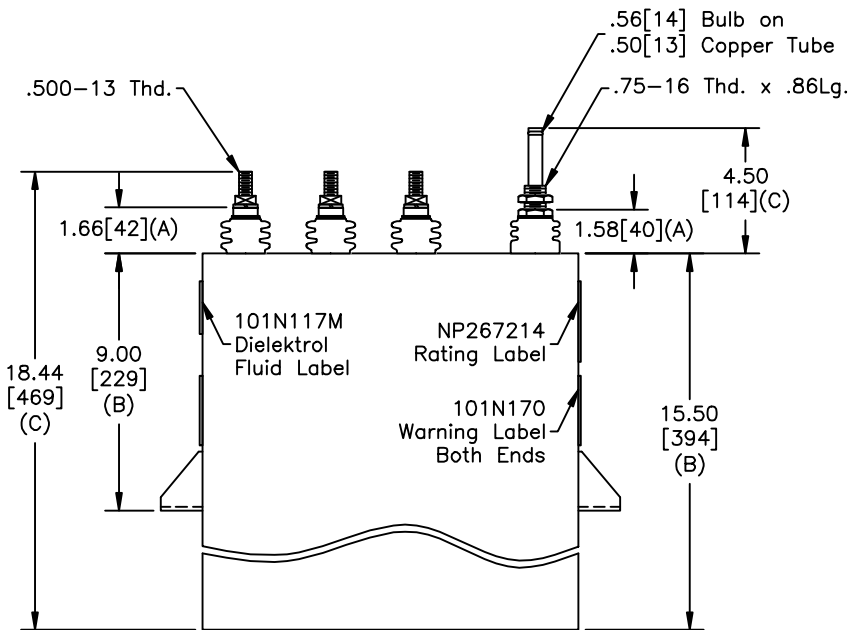

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT. 19L1291WH3026 SN
 181.4 KVAR 420V 400HZ 1PH
 6x68.2 UF/TAP
 2.2 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 MADE IN USA NP267214

- NOTES:
 1. Maximum terminal tightening torque
 .50-13 thd. 15 ft-lbs. 20.3 N-m
 .75-16 thd. 25 ft-lbs. 33.9 N-m
 2. Minimum water flow 1 GPM (3.8 l/m)

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS.

NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN JBCozzens	DATE 10/15/2010	SCALE
ISSUED	DATE 10/15/2010	

Est Weight 69 lbs.
 WC6

OUTLINE
 19L1291WH3026
 SHEET 2 CONT ON 3

DISTR. TO