
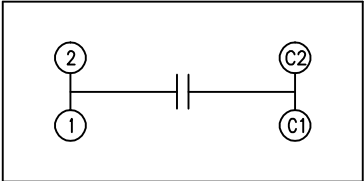


SIZE A	DWG NO 19L1292WH3	SHT 2	REV
REV	DESCRIPTION	DATE	APPROVED

TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

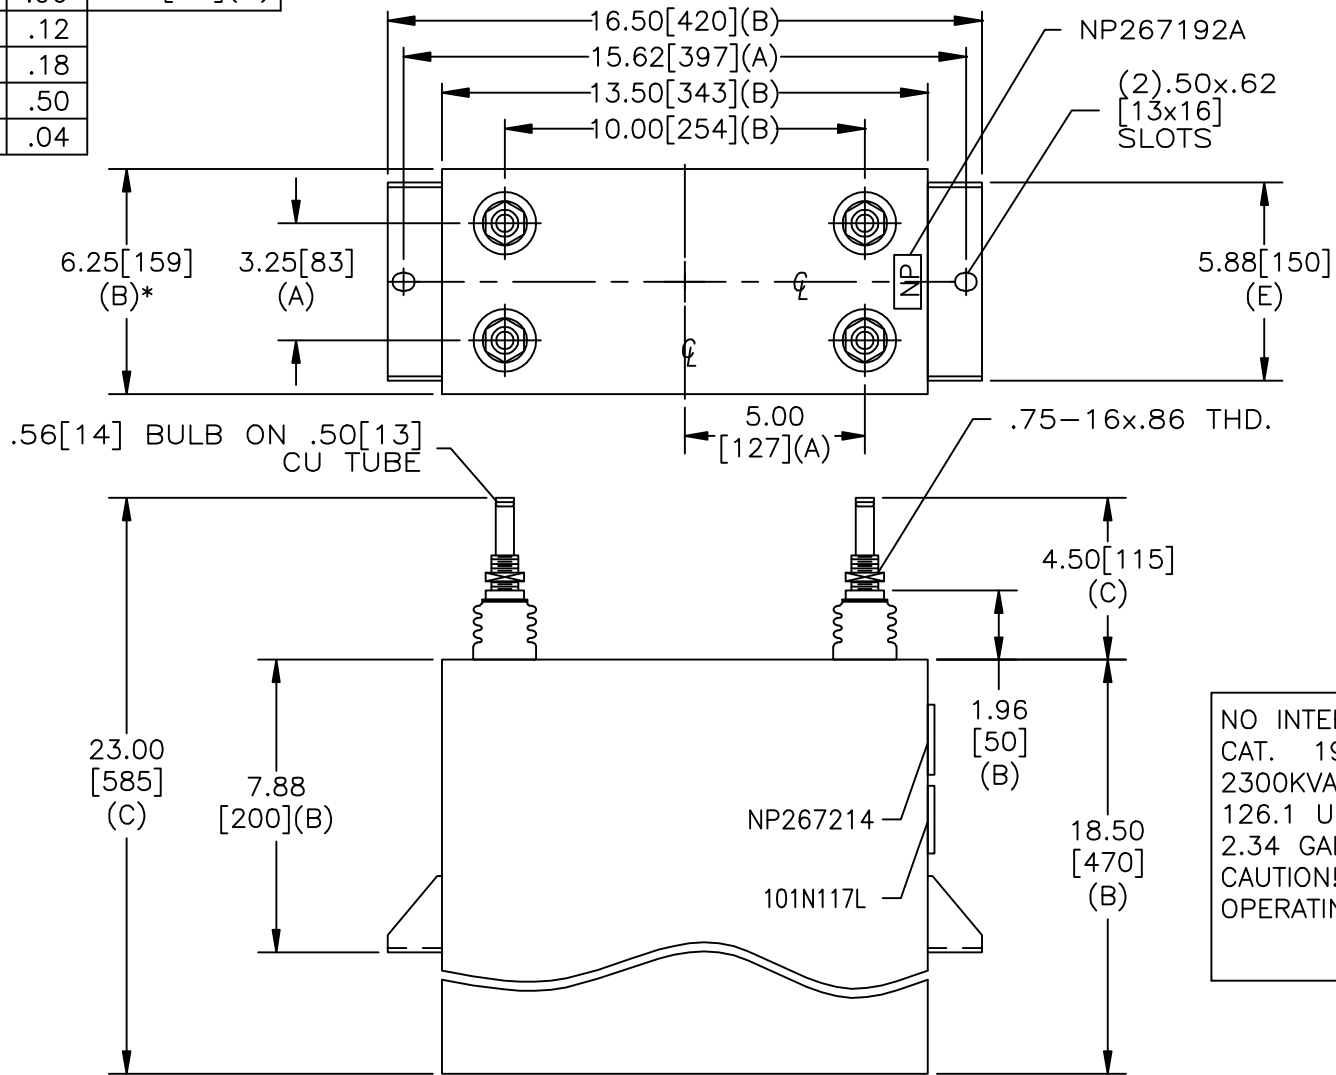

SCHEMATIC DIAGRAM - 105

NO INTERNAL DISCH RESISTORS
 CAT. 19L1292WH3 SN
 2300KVAR 1100V 2400HZ 1PH
 126.1 UF/TAP
 2.34 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1292WH3	
DRAWN DMR	DATE 11/30/2010	SCALE	SHEET 2 CONT ON -	
ISSUED	DATE			

DISTR. TO