



| | | | |
|-----------|-----------------------------|-------------------|-----------------|
| SIZE A | DWG NO 19L1302WH4026 | SHT 2 | REV 2 |
| REV 2 | DESCRIPTION ADD HARDWARE | DATE 9/26/2012 | APPROVED JBC |

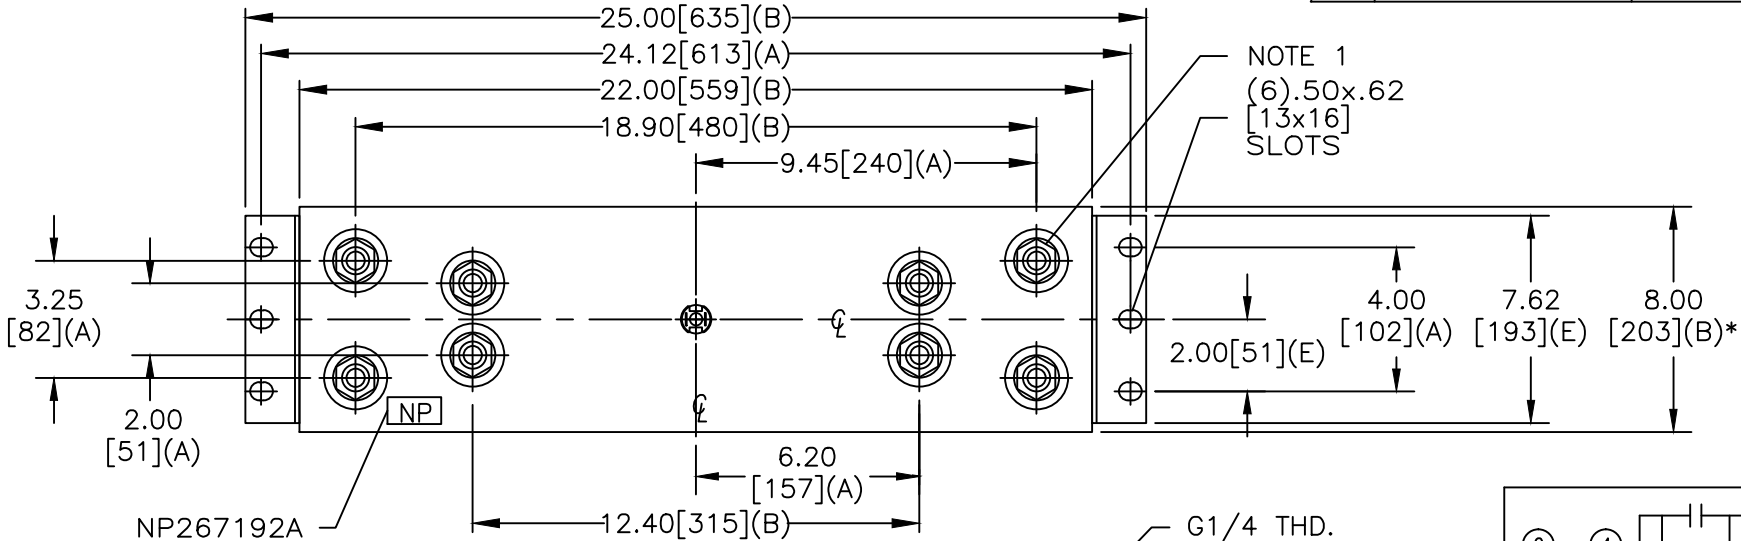


PRESS.SW.
12 PSIG N.C.

G1/4 THD.
M18x1.50 THD.

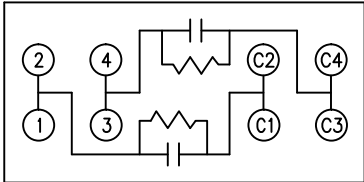

SCHMATIC DIAGRAM - 240

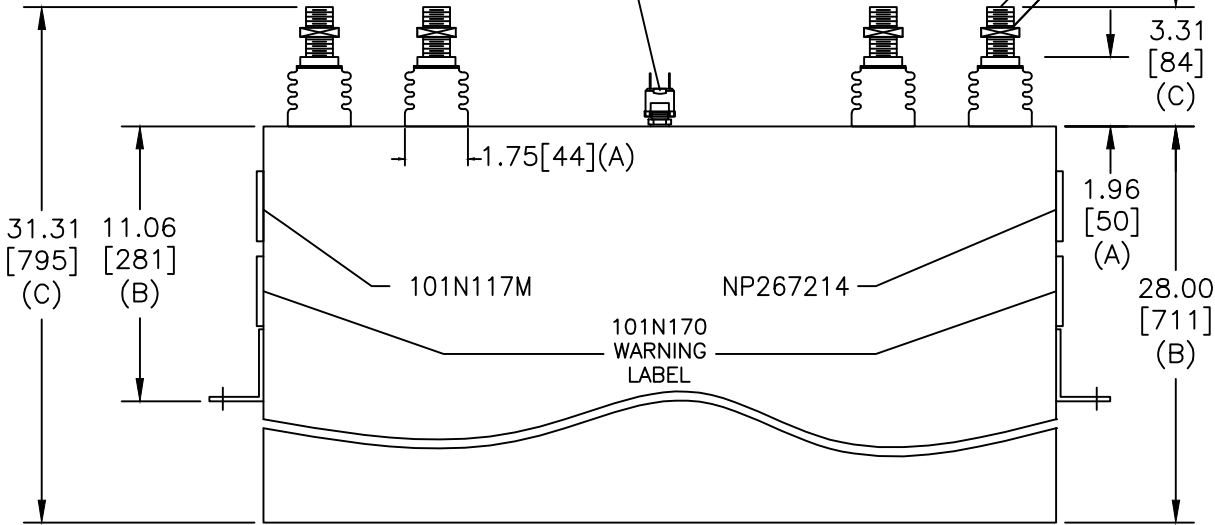

GE CAPACITOR
WITH INTERNAL DISCHARGE RESISTORS

CAT. 19L1302WH4026 SN
6300 KVAR 1500V 500HZ 1PH
2X445.6 UF/TAP
6.6 GAL. COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733

MADE IN U.S.A. NP267214

* UP TO +.75 [19]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

| | | |
|--|-------------------|-----------|
| GE ENERGY FORT EDWARD, N.Y., U.S.A. | | SIZE A |
| DRAWN DMR | DATE 2/27/2012 | SCALE |
| ISSUED | DATE | |

OUTLINE
19L1302WH4026

SHEET 2 CONT ON 3

DISTR. TO