



SIZE A	DWG NO 19L1323WH4	SHT 2	REV 1
REV 1	DESCRIPTION FIX NP	DATE 4/10/2014	APPROVED JBC


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

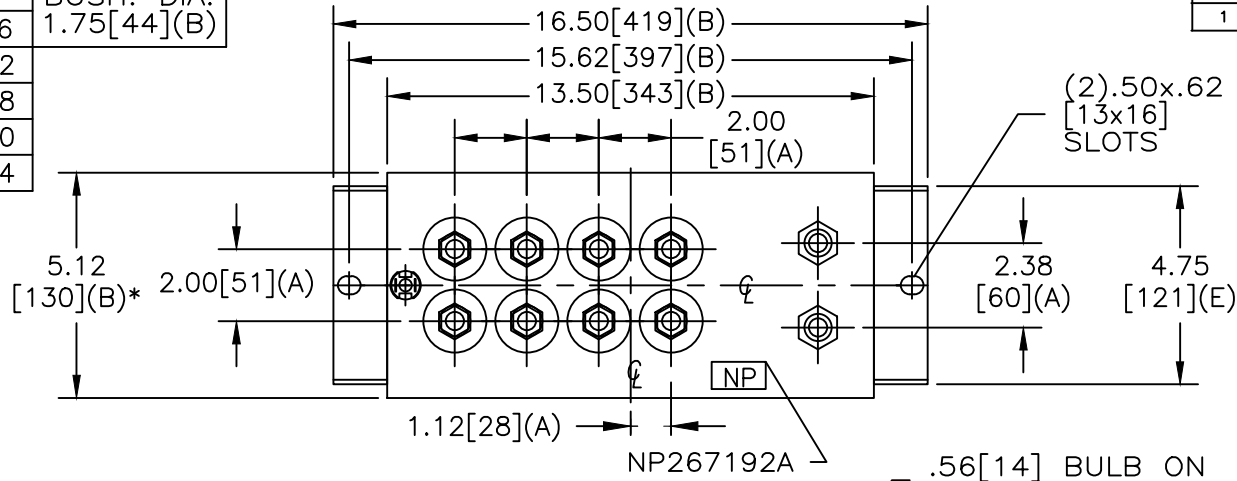

TERM	uF	kVAR
1	20.80	316.25
2	20.80	316.25
3	20.80	316.25
4	20.80	316.25
5	20.80	316.25
6	20.80	316.25
7	20.80	316.25
8	20.80	316.25

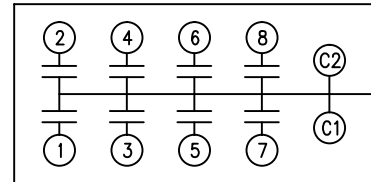

SCHEMATIC DIAGRAM - 801

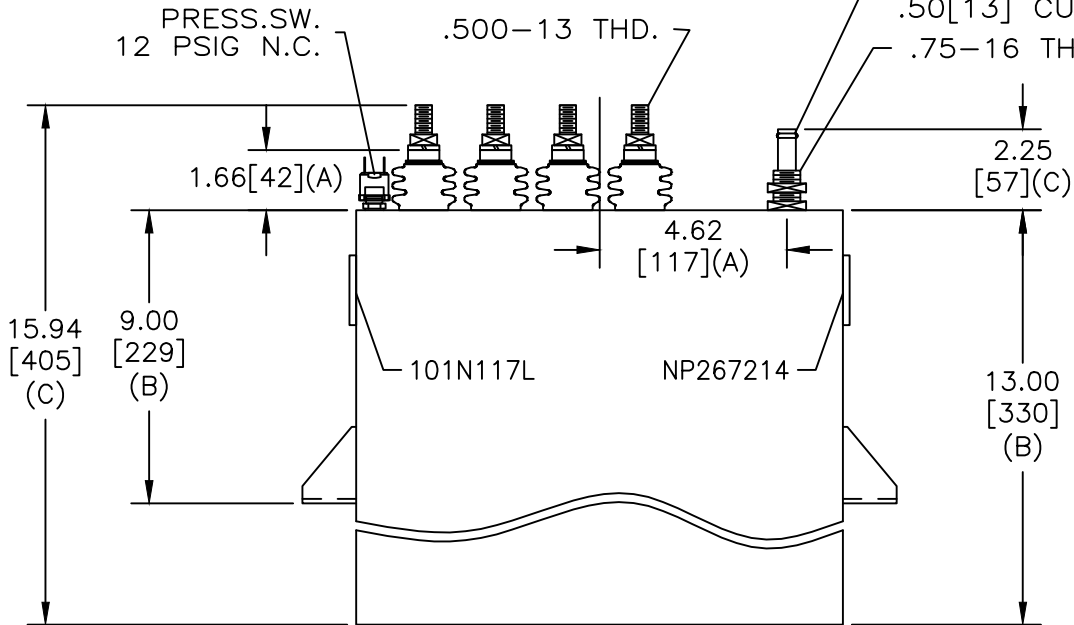

NO INTERNAL DISCHARGE RESISTORS
 CAT. 19L1323WH4 SN
 2530AR 1100V 2000HZ 1PH
 8x20.8 UF/TAP
 1.80 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN JB Cozzens	DATE 12/17/2013	SCALE
ISSUED	DATE 12/17/2013	

OUTLINE
19L1323WH4

SHEET 2 CONT ON -

DISTR. TO