



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

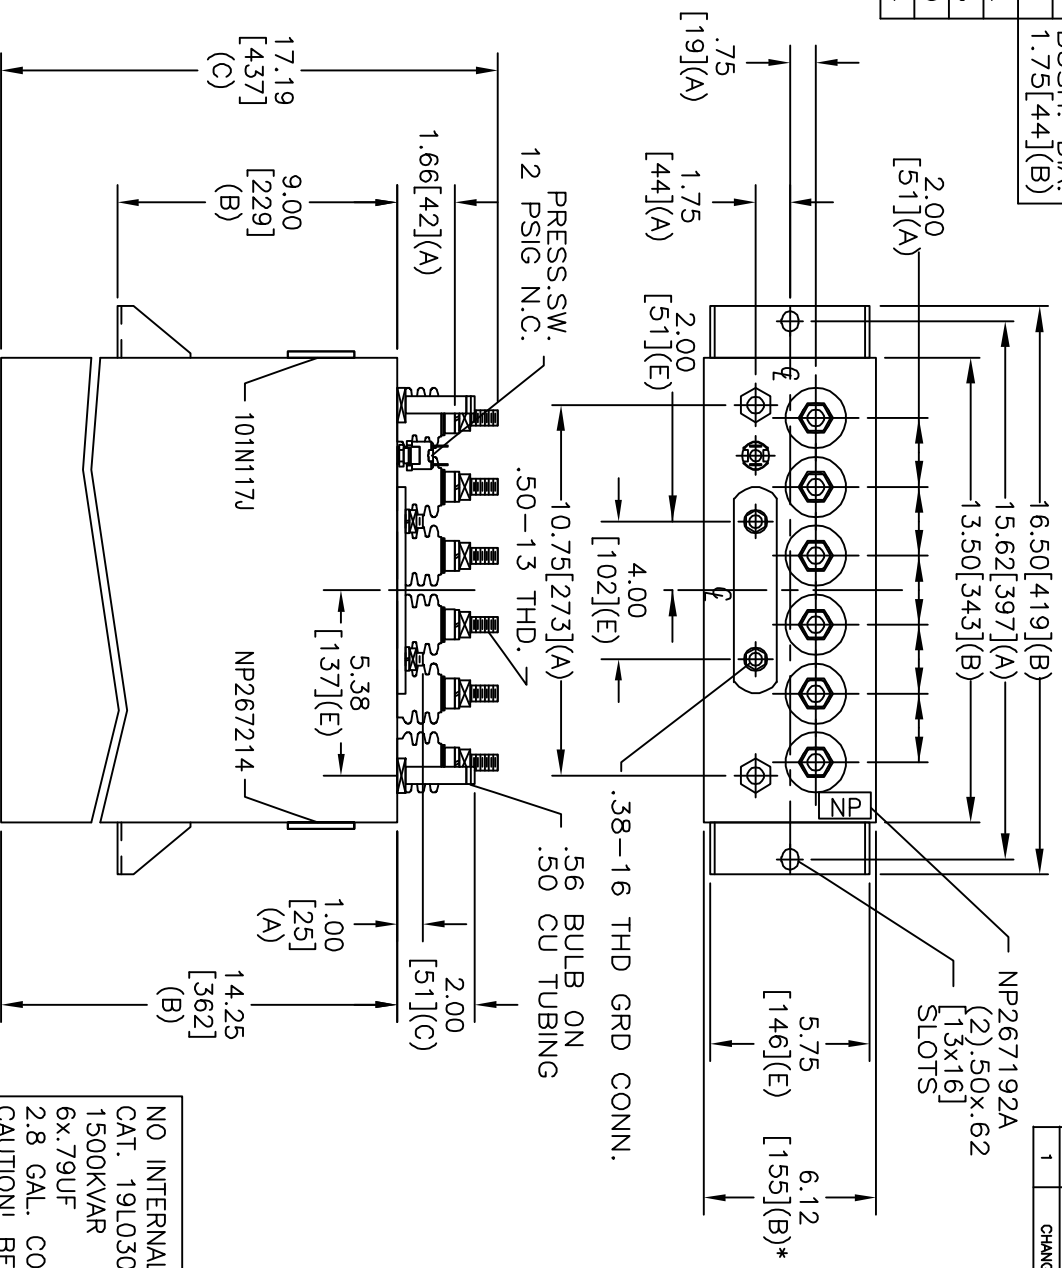

SIZE	DWG NO	SHT	REV
A	19L0307WH4	2	1
REV	DESCRIPTION	DATE	APPROVED
1	CHANGE NAMEPLATE	7-7-04	EJM

TERM	UF	KVAR
1	.79	250
2	.79	250
3	.79	250
4	.79	250
5	.79	250
6	.79	250

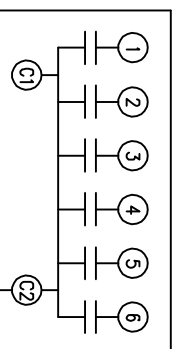

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0307WH4 SN
 1500KVAR 1500V 22500HZ 1PH
 6x.79UF
 2.8 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. McGinn
 DATE 6-9-97

ISSUED DATE 6-18-97

SIZE **A**

OUTLINE
 19L0307WH4

SHEET 2 CONT -

DISTR. TO