



SIZE A	DWG NO 19L0689WH4	SHT 2	REV 1
REV 1	DESCRIPTION UPDATE CAT NO.	DATE 11/6/02	APPROVED BTR


TOL	+/-	BUSH. DIA. 1.75[44](B)
A	.06	
B	.12	
C	.18	
D	.50	
E	.04	

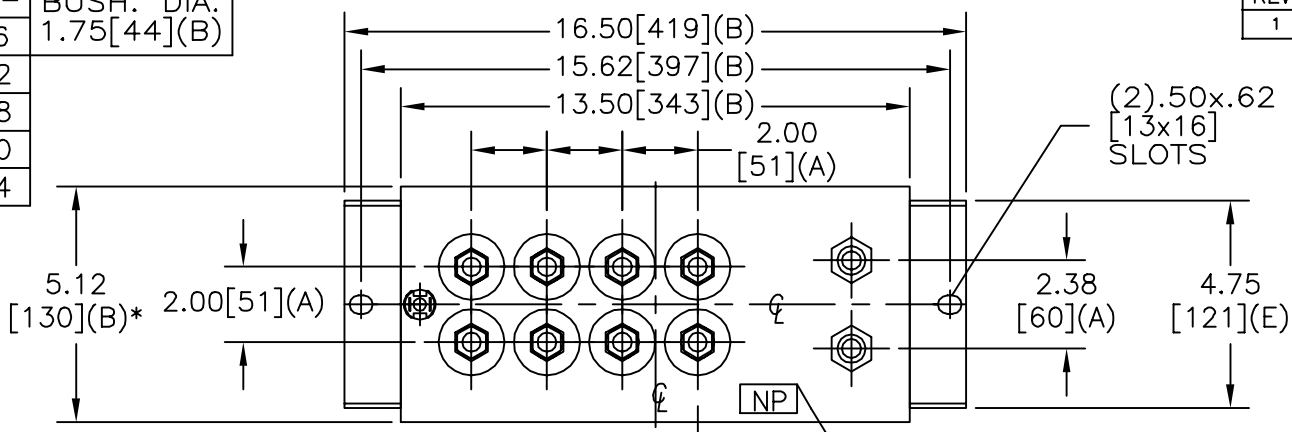

TERM	uF	kVAR
1	17.53	266.5
2	17.53	266.5
3	21.71	330.2
4	21.71	330.2
5	21.71	330.2
6	21.71	330.2
7	21.71	330.2
8	21.71	330.2

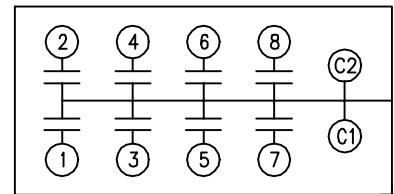

SCHEMATIC DIAGRAM - 801

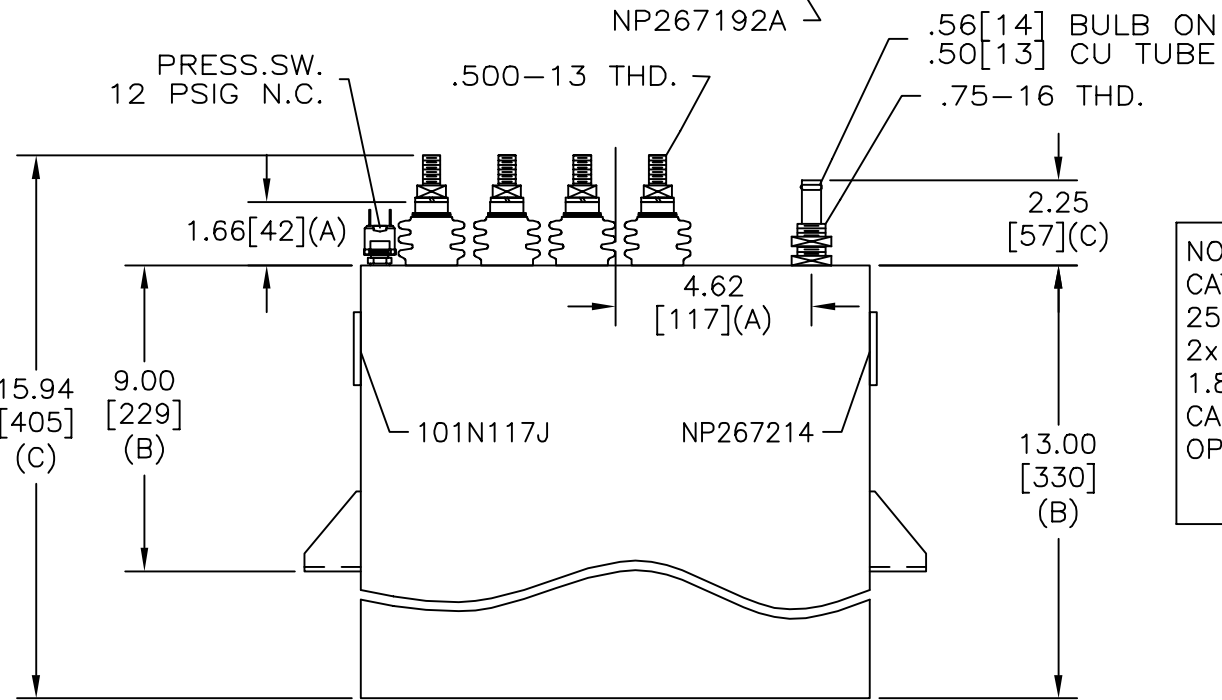

NO INTERNAL DISCH RESISTORS
 CAT. 19L0689WH4 SN
 2514KVAR 1100V 2000HZ 1PH
 2x17.53+6x21.71 UF/TAP
 1.80 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.	SIZE	A	
	DRAWN	E. McGinn	DATE
ISSUED		DATE	8/20/97
SCALE			

<h1>OUTLINE</h1> <h2>19L0689WH4</h2>	
SHEET	2
CONT	ON -

DISTR. TO