



SIZE A	DWG NO 19L0798WH4	SHT 2	REV 1
REV 1	DESCRIPTION UPDATE CAT NO.	DATE 3/12/03	APPROVED BTR

TOL	+/-	BUSH. DIA. 1.75[44](B)
A	.06	
B	.12	
C	.18	
D	.50	
E	.04	

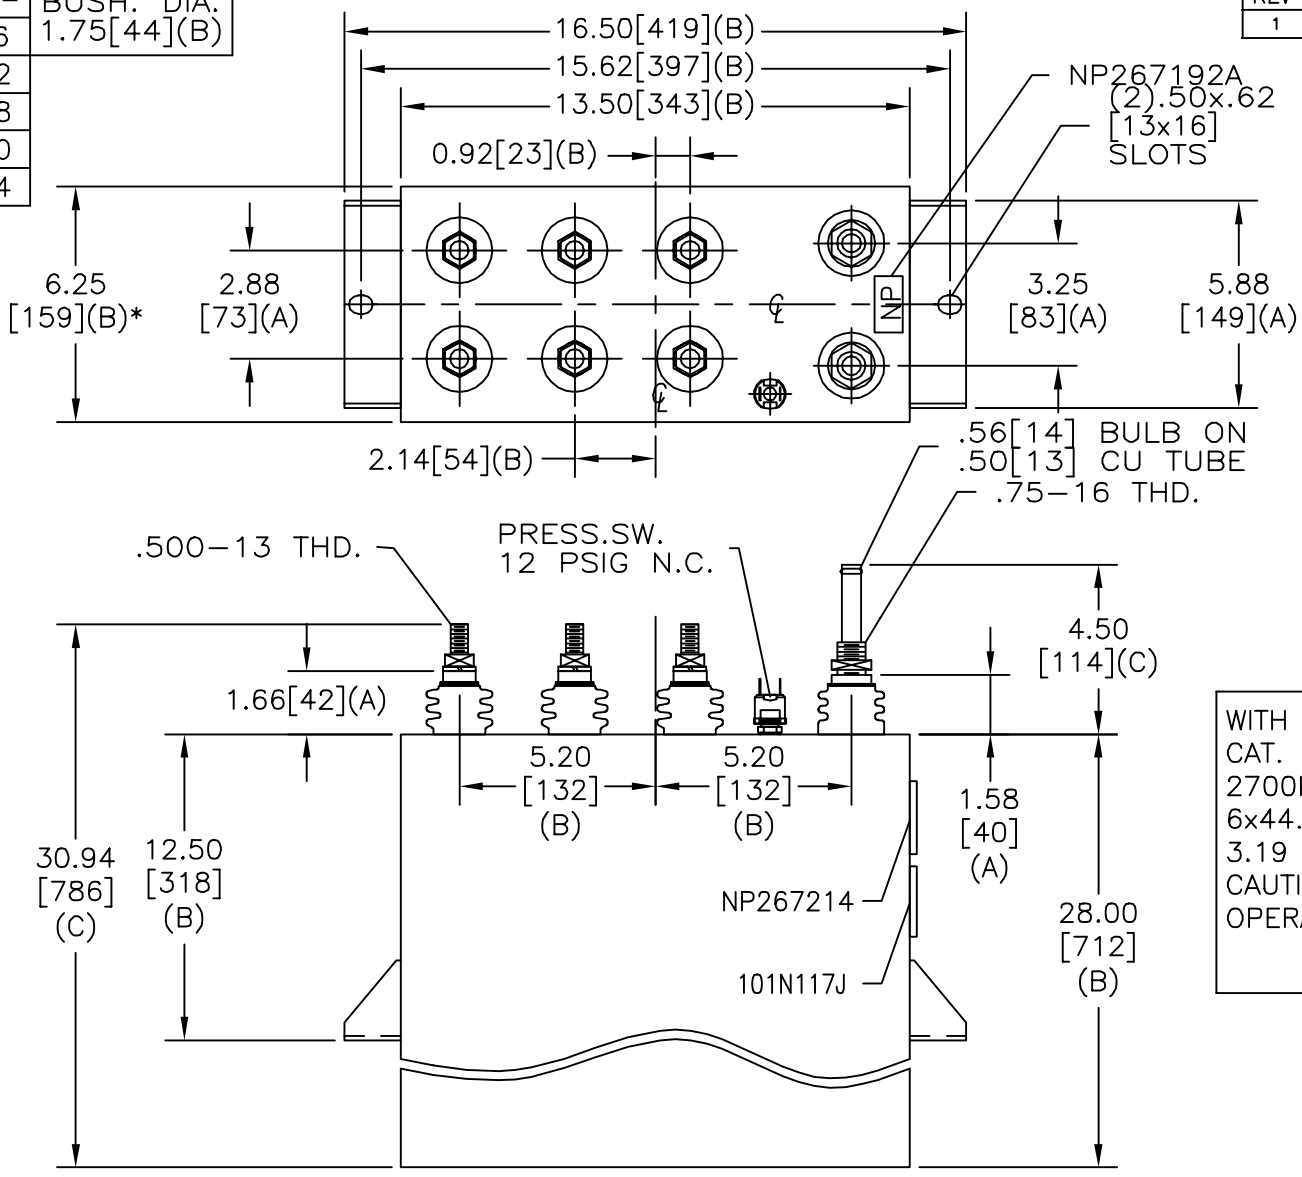

TERM	uF	kVAR
1	44.21	450
2	44.21	450
3	44.21	450
4	44.21	450
5	44.21	450
6	44.21	450

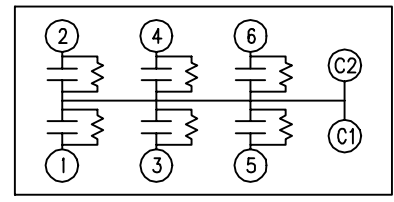

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0798WH4 SN
 2700KVAR 1800V 500HZ 1PH
 6x44.21 UF/TAP
 3.19 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN EPC	DATE 8/29/96	SCALE
ISSUED	DATE 9-4-96	

<h1>OUTLINE</h1> <h2>19L0798WH4</h2>	
SHEET 2	CONT ON 3

DISTR. TO