



SIZE A	DWG NO 19L1029WH4	SHT 2	REV
REV	DESCRIPTION	DATE	APPROVED

TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

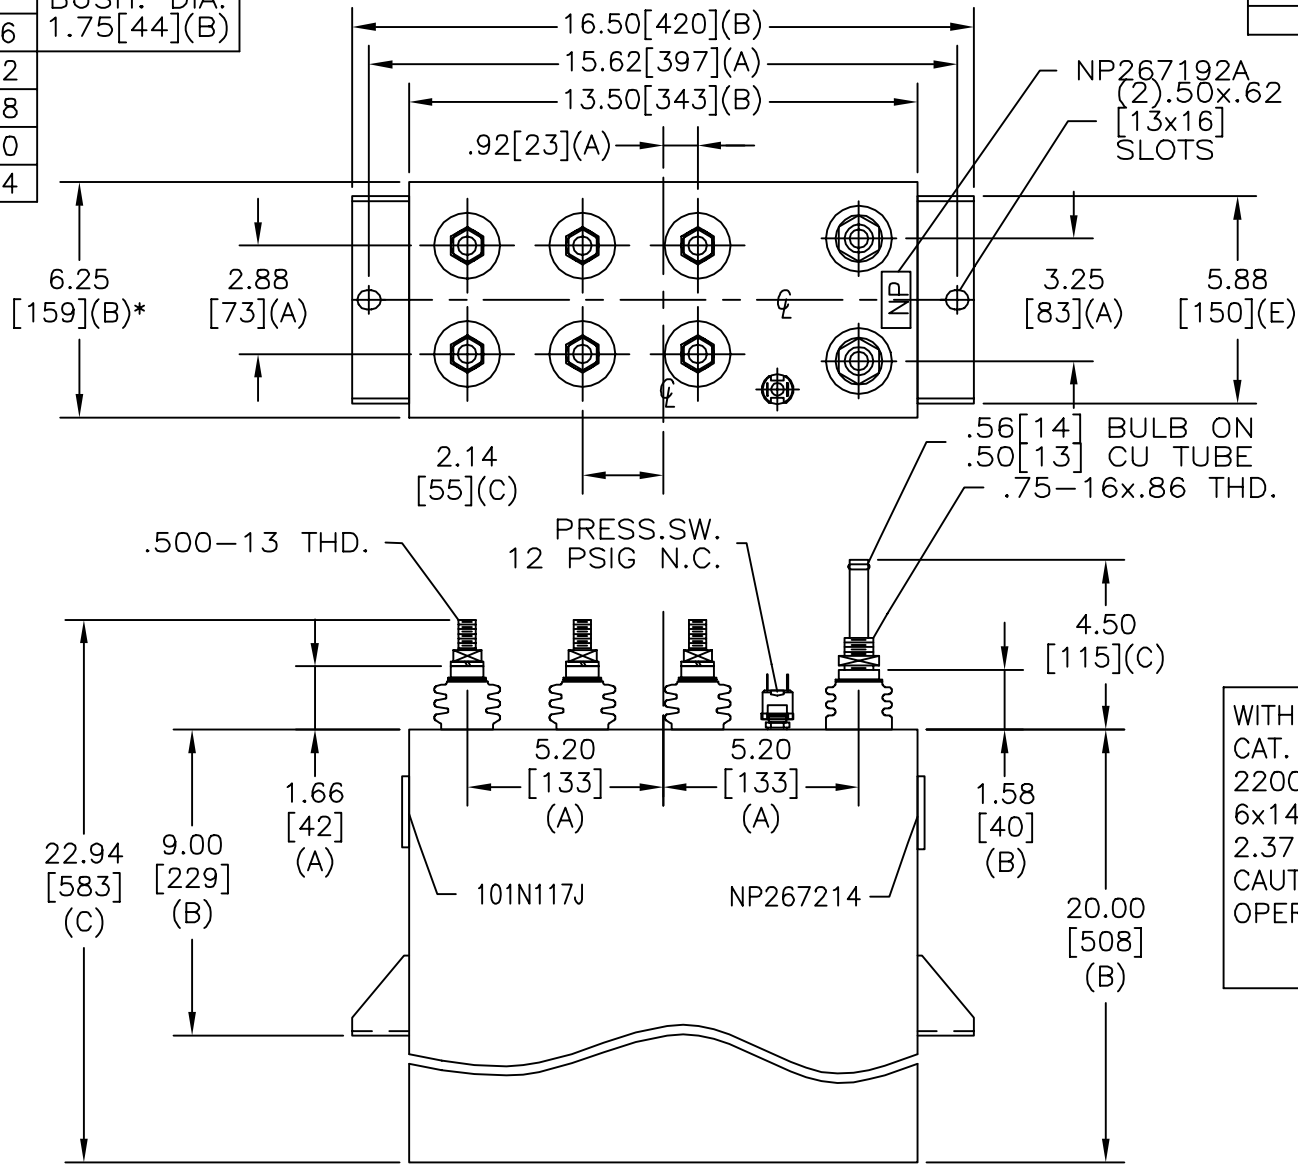

TERM	uF	kVAR
1	14.59	366.7
2	14.59	366.7
3	14.59	366.7
4	14.59	366.7
5	14.59	366.7
6	14.59	366.7

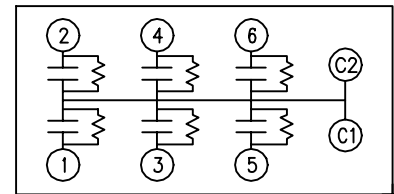

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT. 19L1029WH4 SN
 2200KVAR 2000V 1000HZ 1PH
 6x14.59 UF/TAP
 2.37 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.	SIZE A
	SCALE
DRAWN B. ROSS	DATE JUN 7, 2002
ISSUED	DATE

OUTLINE 19L1029WH4	
SHEET 2	CONT ON 3

DISTR. TO