

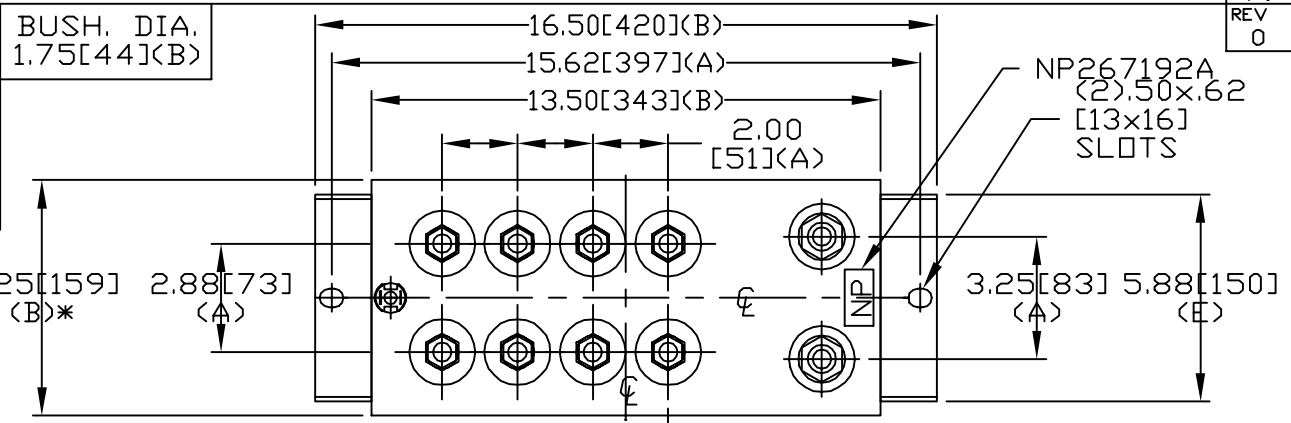


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

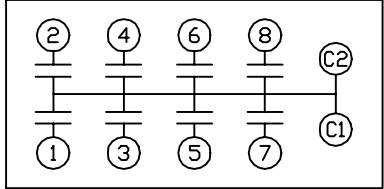

TERM	uF	kVAR
1	28.78	312.5
2	28.78	312.5
3	28.78	312.5
4	28.78	312.5
5	28.78	312.5
6	28.78	312.5
7	28.78	312.5
8	28.78	312.5

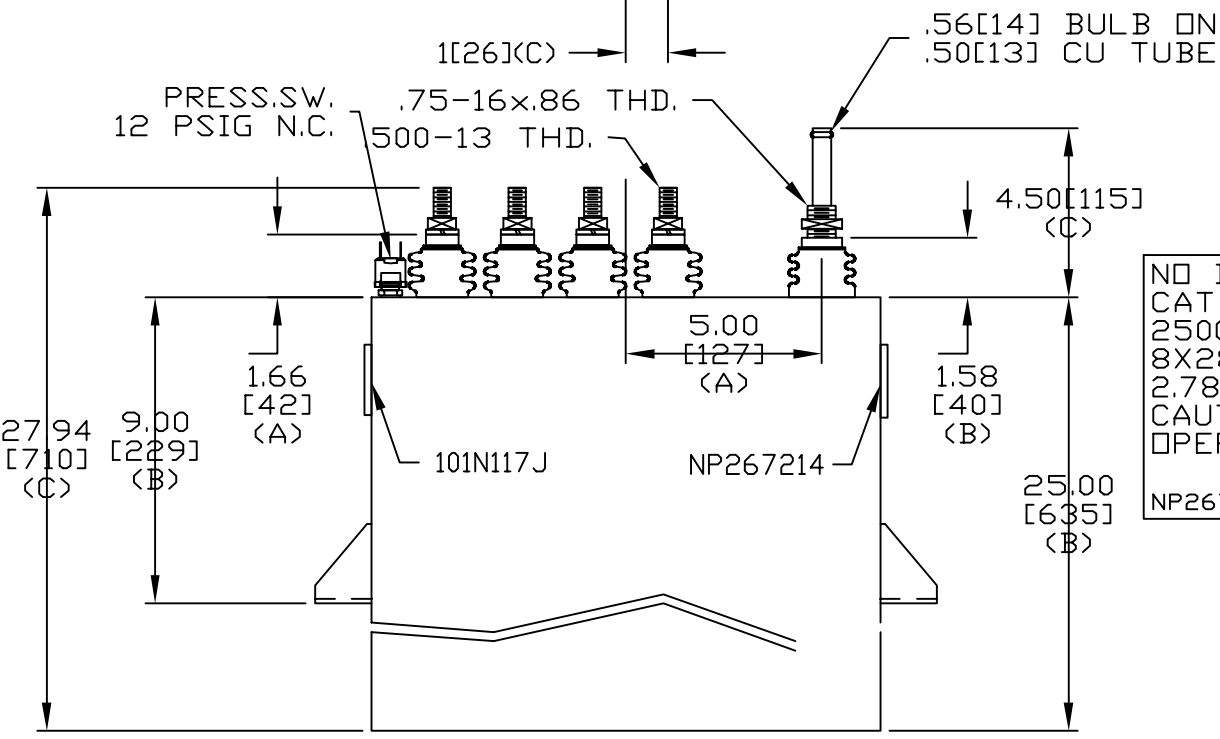

NO INTERNAL DISCH RESISTORS
 CAT 19L1192WH4 SN
 2500KVAR 1200V 1200HZ 1PH
 8X28.78 UF/TAP
 2.78 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

 CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	SIZE A	UNIT WEIGHT 113 / 51 LB/KG	OUTLINE 19L1192WH4	SHEET 2 CONT. ON 3
	DRAWN 02/05/02 LRD ?	SCALE WC7		
ISSUED				

DISTR TO