



SIZE A	DWG NO 19L1228WH4	SHT 2	REV
REV	DESCRIPTION	DATE	APPROVED

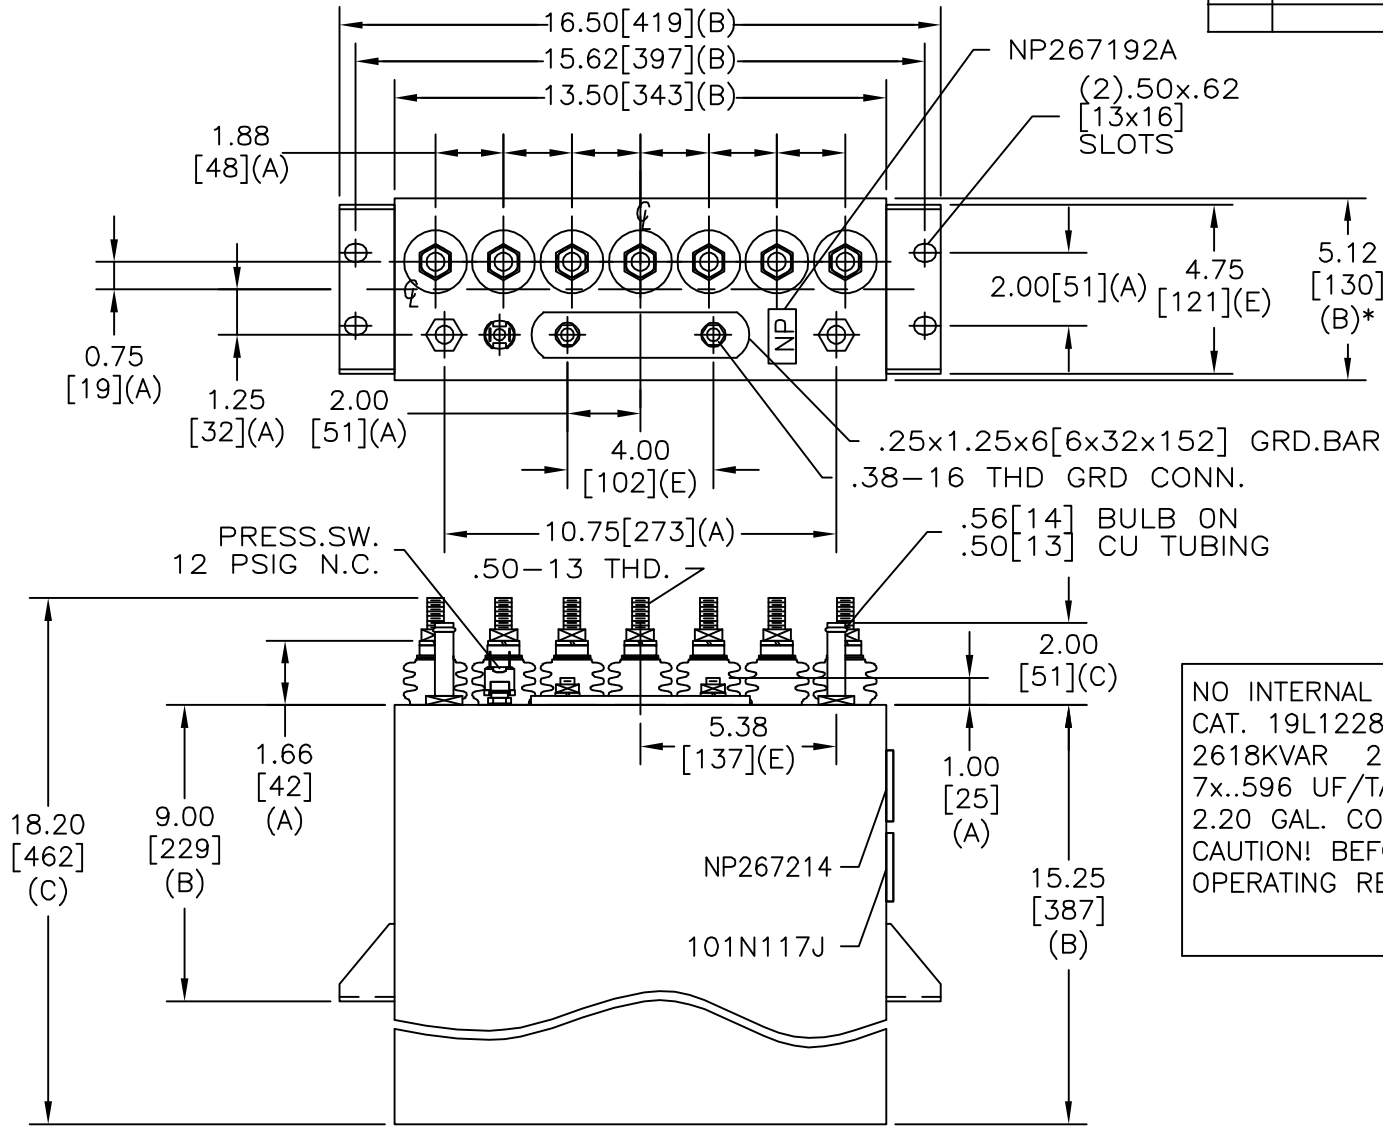

TERM	uF	kVAR
1	.596	374
2	.596	374
3	.596	374
4	.596	374
5	.596	374
6	.596	374
7	.596	374

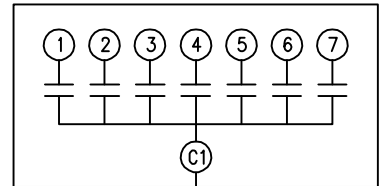

SCHMATIC DIAGRAM - 716

NO INTERNAL DISCH RESISTORS
 CAT. 19L1228WH4 SN
 2618KVAR 2000V 25000HZ 1PH
 7x.596 UF/TAP
 2.20 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN B.ROSS	DATE OCT 8, 2003	SCALE
ISSUED	DATE 10/22/03	

<h1>OUTLINE</h1> <h2>19L1228WH4</h2>		SHEET 2	CONT ON -
--------------------------------------	--	------------	--------------

DISTR. TO