



SIZE A	DWG NO 19L1229WH4	SHT 2	REV
REV	DESCRIPTION	DATE	APPROVED

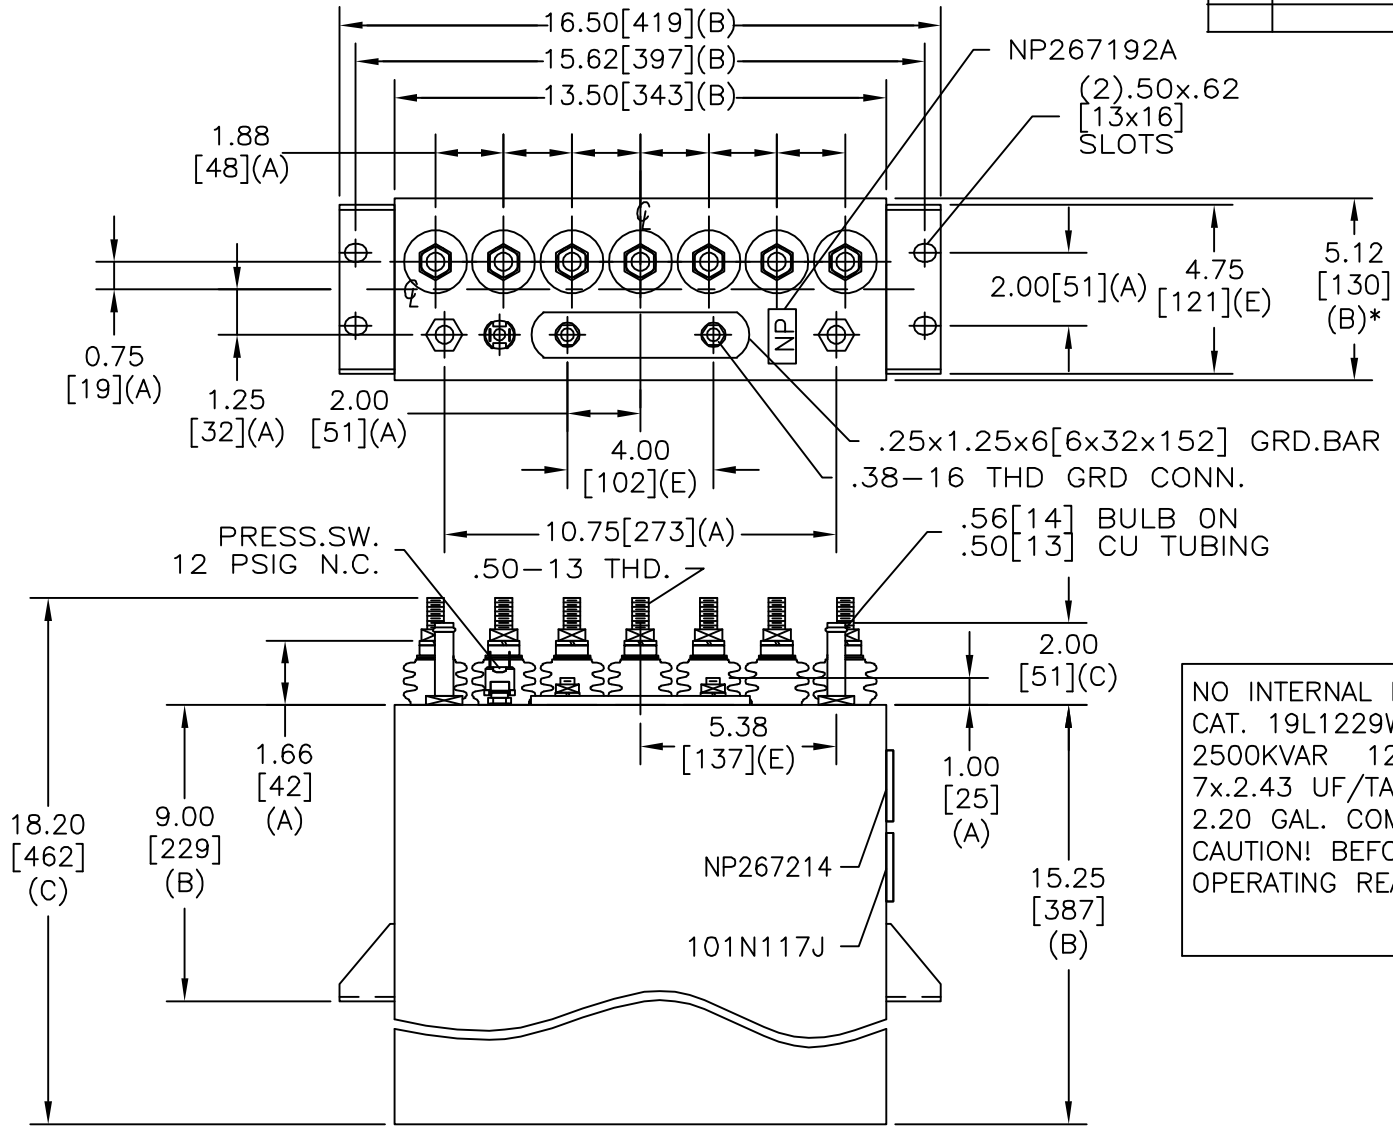

TERM	uF	kVAR
1	2.43	357.14
2	2.43	357.14
3	2.43	357.14
4	2.43	357.14
5	2.43	357.14
6	2.43	357.14
7	2.43	357.14

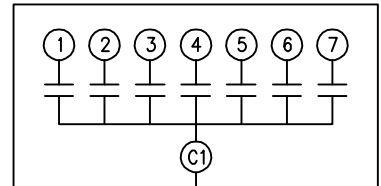

SCHMATIC DIAGRAM - 716

NO INTERNAL DISCH RESISTORS
 CAT. 19L1229WH4 SN
 2500KVAR 1250V 15000HZ 1PH
 7x.2.43 UF/TAP
 2.20 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.	SIZE A	<h1>OUTLINE</h1> <h2>19L1229WH4</h2>
	DRAWN B.ROSS DATE OCT 8, 2003 ISSUED DATE 10/22/03	
SHEET 2		CONT ON -

DISTR. TO