
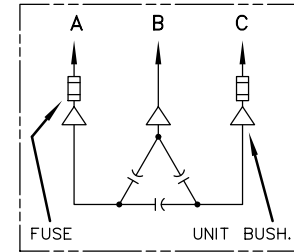


SOLDERLESS CONN.
FOR #10 SOLID TO
#4 STR'D COND.

.25-20
GRD SCR.

SOLDERLESS CONN.
FOR #10 SOLID TO
#2 STR'D COND.

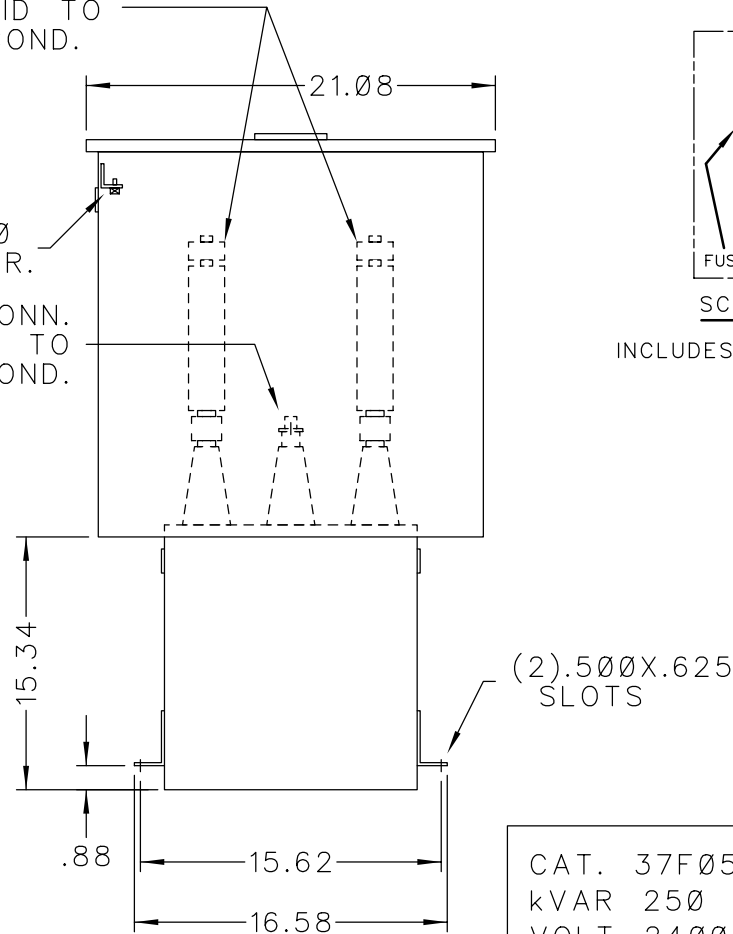


SCHEMATIC DIAGRAM

INCLUDES DISCHARGE RESISTORS

CAT. 37F0520420 SER.NO.
kVAR 250 Hz 60 Ph 3
VOLT 2400 CONN. DELTA
DIAG
GEH-2711
NP220452

NOTE:
ADD "037" SUFFIX TO
CATALOG NO. FOR
CSA LABELED PRODUCT.

 CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	SIZE A	APPROX. WT 103 LBS
	SCALE	
DRAWN JCozzens	JULY 29, 1997	
ISSUED		

OUTLINE
37F0520420

SHEET 2

DISTR TO