

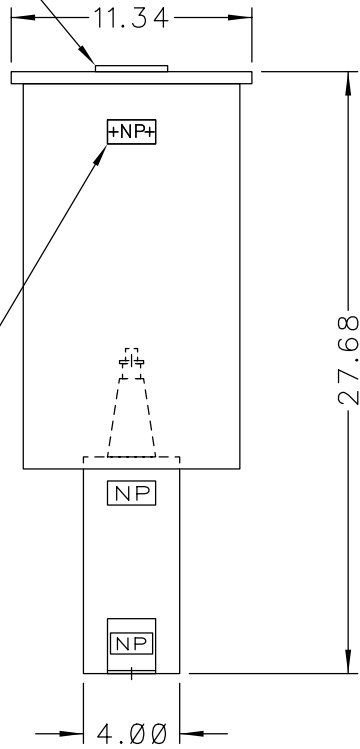


101N140  
LOCATE ON  
CENTER OF  
COVER



SOLDERLESS CONN.  
FOR #10 SOLID TO  
#2 STR'D COND.

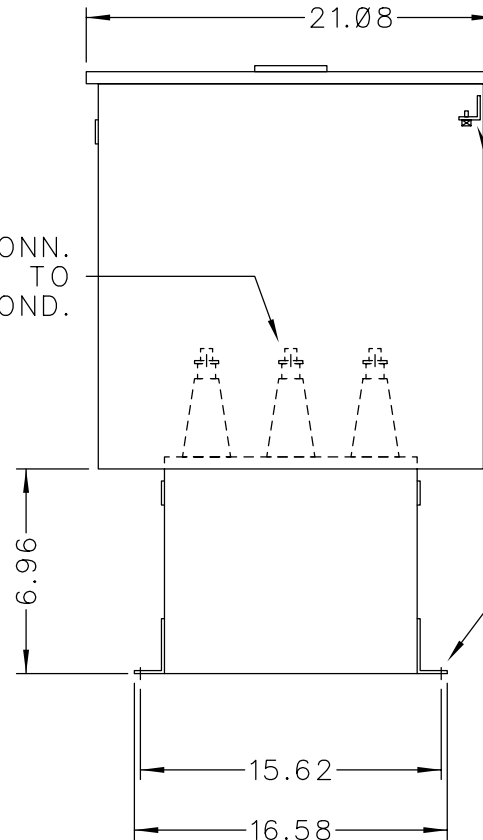


SCHEMATIC DIAGRAM

INCLUDES DISCHARGE RESISTORS

0.5-2.5  
GRD SCR.

CAT. 37F0520451 SER.NO.  
kVAR 25 Hz 60 Ph 3  
VOLT 2400 CONN. DELTA  
DIAG  
GEH-2711  
NP220452

NOTE:  
ADD "037" SUFFIX TO  
CATALOG NO. FOR  
CSA LABELED PRODUCT.

 <p>CAPACITOR &amp; POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	<p>DRAWN E.McGINN</p>	<p>MAR. 23, 1999</p>
	<p>ISSUED</p>	<p>SCALE</p>

<p>APPROX.WT 64 LBS</p>
-----------------------------

<p>OUTLINE 37F0520451</p>	<p>SHEET 2</p>
-------------------------------	--------------------