
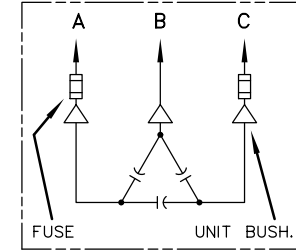


SOLDERLESS CONN.  
FOR #10 SOLID TO  
#4 STR'D COND.

CONNECTION  
FOR USER  
SUPPLIED  
120V POWER

SOLDERLESS CONN.  
FOR #10 SOLID TO  
#2 STR'D COND.

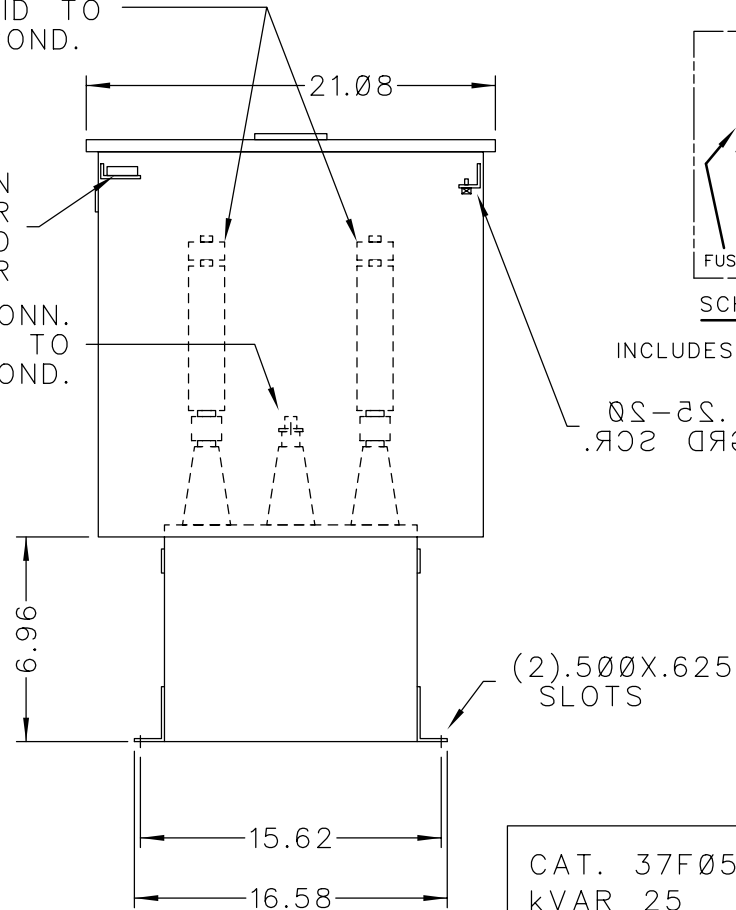


SCHEMATIC DIAGRAM

INCLUDES DISCHARGE RESISTORS

05-25.  
R02 090

CAT. 37F0520511	SER.NO.
kVAR 25	Hz 60 Ph 3
VOLT 2400	CONN. DELTA
DIAG	
	GEH-2711
NP220452	

NOTE:  
ADD "037" SUFFIX TO  
CATALOG NO. FOR  
CSA LABELED PRODUCT.

 CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	SIZE <b>A</b>
	APPROX.WT 64 LBS
DRAWN E.McGINN	SEPT. 11, 1998
ISSUED	SCALE

OUTLINE  
37F0520511