



SOLDERLESS CONN.  
FOR #10 SOLID TO  
#4 STR'D COND.

.25-20  
GRD SCR.

SOLDERLESS CONN.  
FOR #10 SOLID TO  
#2 STR'D COND.

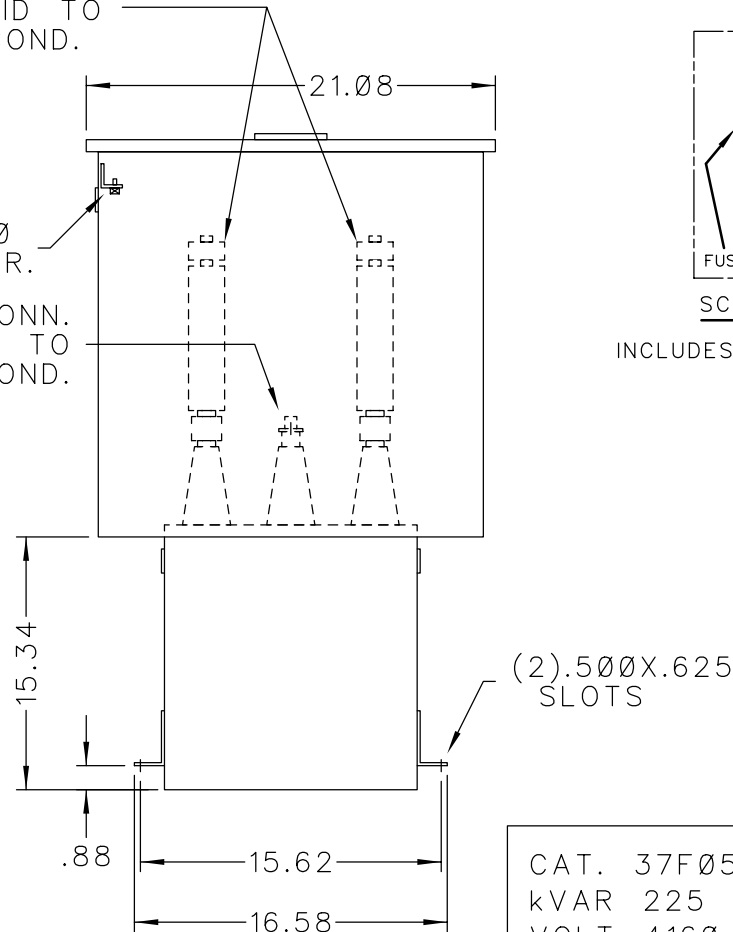

SCHEMATIC DIAGRAM

INCLUDES DISCHARGE RESISTORS

CAT. 37F0523419 SER.NO.  
kVAR 225 Hz 60 Ph 3  
VOLT 4160 CONN. DELTA  
DIAG  
NP220452 GEH-2711

NOTE:  
ADD "037" SUFFIX TO  
CATALOG NO. FOR  
CSA LABELED PRODUCT.