

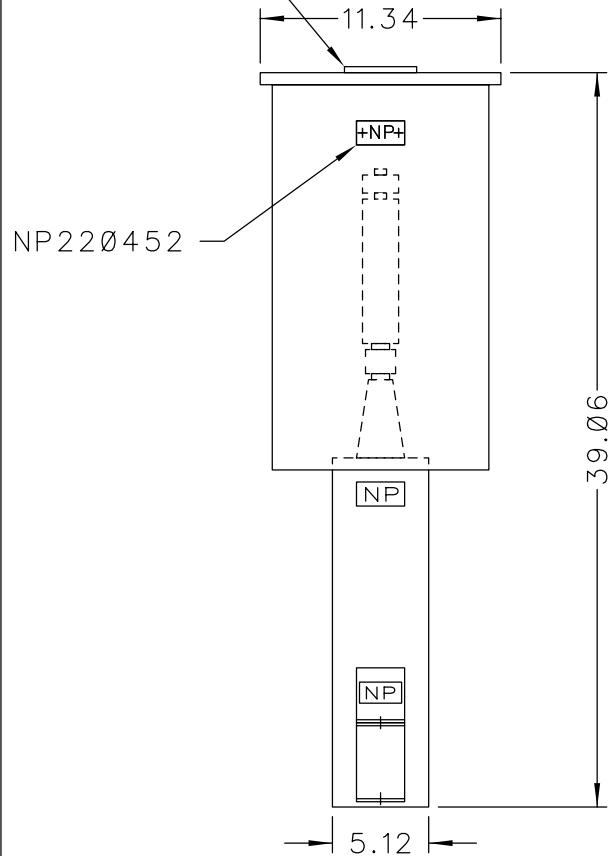


101N140
LOCATE ON
CENTER OF
COVER

SOLDERLESS CONN.
FOR #10 SOLID TO
#4 STR'D COND.



.25-20
GRD SCR.

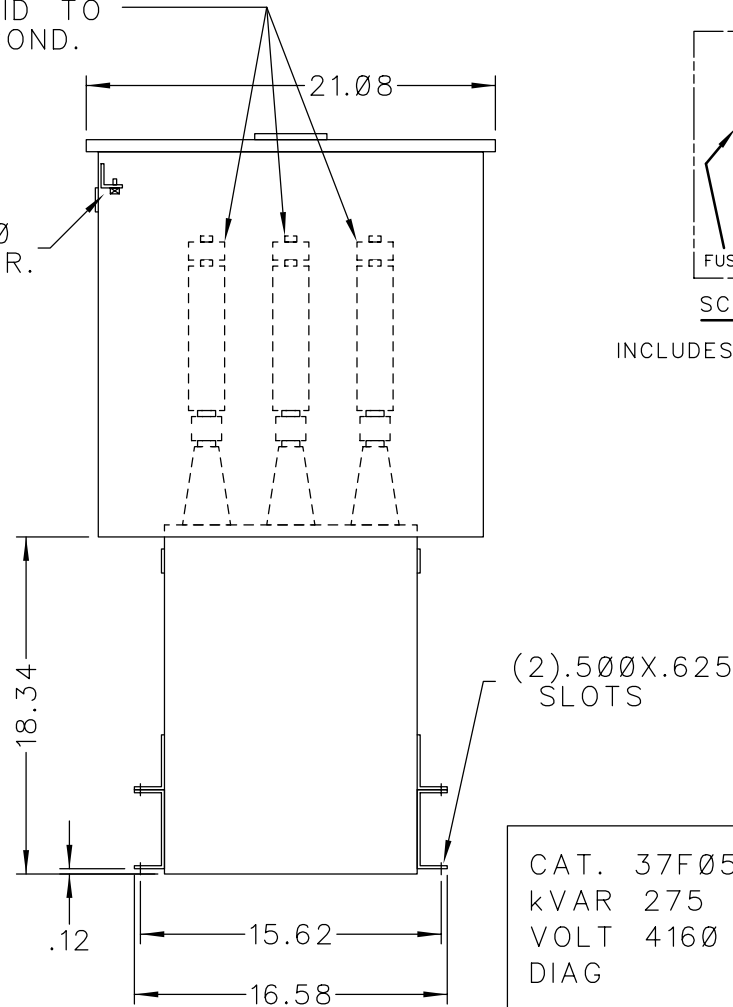


SCHEMATIC DIAGRAM

INCLUDES DISCHARGE RESISTORS

CAT. 37F0523441 SER.NO.	
kVAR 275	Hz 60 Ph 3
VOLT 4160	CONN. DELTA
DIAG	
NP220452	GEH-2711

NOTE:
ADD "037" SUFFIX TO
CATALOG NO. FOR
CSA LABELED PRODUCT.

 <p>CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	SIZE A	APPROX.WT 114 LBS
	DRAWN JCozzens ISSUED 7-30-97	JULY 23, 1997 SCALE

OUTLINE
37F0523441