



101N140
LOCATE ON
CENTER OF
COVER






+NP+

NP220452

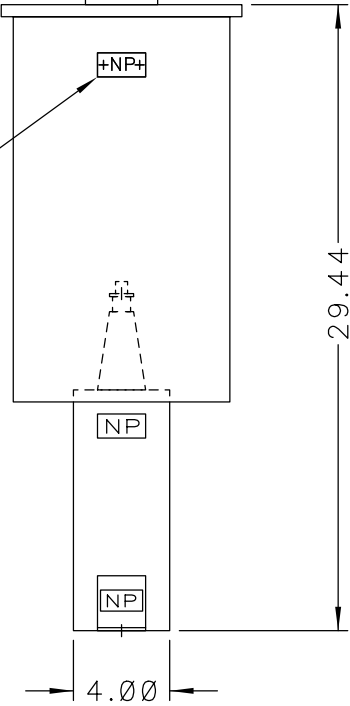

.25-20
GRD SCR.

SOLDERLESS CONN.
FOR #10 SOLID TO
#2 STR'D COND.

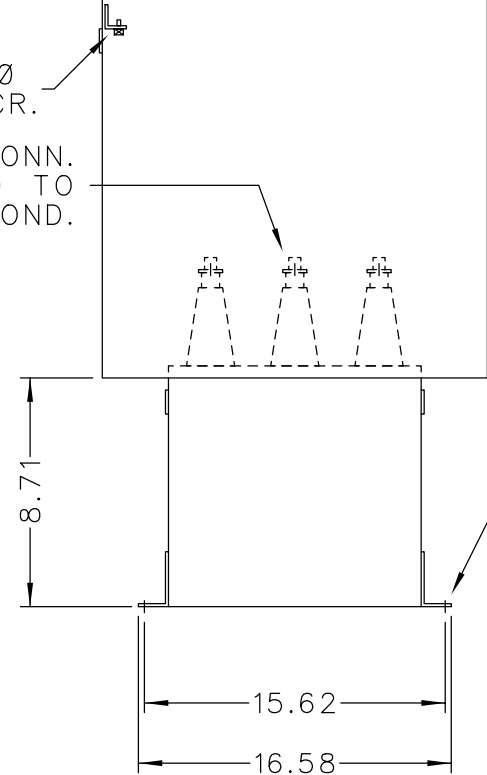


SCHEMATIC DIAGRAM

INCLUDES DISCHARGE RESISTORS

(2).500X.625
SLOTS

CAT. 37F0523454 SER.NO.	
kVAR 100	Hz 60 Ph 3
VOLT 4160	CONN. DELTA
DIAG	
GEH-2711	
NP220452	

NOTE:
ADD "037" SUFFIX TO
CATALOG NO. FOR
CSA LABELED PRODUCT.

 <p>CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	SIZE A	APPROX.WT 69 LBS
	DRAWN E.McGINN	
ISSUED	SCALE	

OUTLINE
37F0523454

SHEET 2

DISTR TO