



SOLDERLESS CONN.
FOR #10 SOLID TO
#4 STR'D COND.

CONNECTION
FOR USER
SUPPLIED
120V POWER

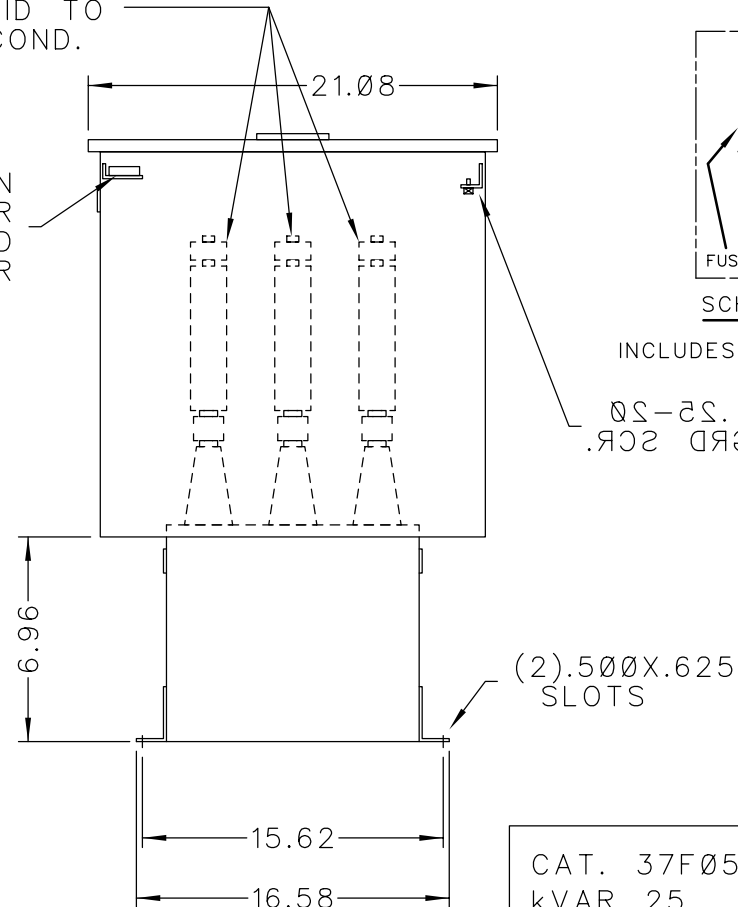

SCHEMATIC DIAGRAM

INCLUDES DISCHARGE RESISTORS

0.5-5.0
GRD SCR.

CAT. 37F0523531 SER.NO.
kVAR 25 Hz 60 Ph 3
VOLT 4160 CONN. DELTA
DIAG
NP220452 GEH-2711

NOTE:
ADD "037" SUFFIX TO
CATALOG NO. FOR
CSA LABELED PRODUCT.