


| | | | |
|-----------|---------------------|----------|----------|
| SIZE A | DWG NO 65L822TL2 | SHT 2 | REV |
| REV | DESCRIPTION | DATE | APPROVED |






.25-20x.41 THD.
FOR GRD. CONN.

(4).31x.50
SLOTS

.31-18x1.00 BOLT
FOR LINE CONN.



SCHEMATIC DIAGRAM - 302

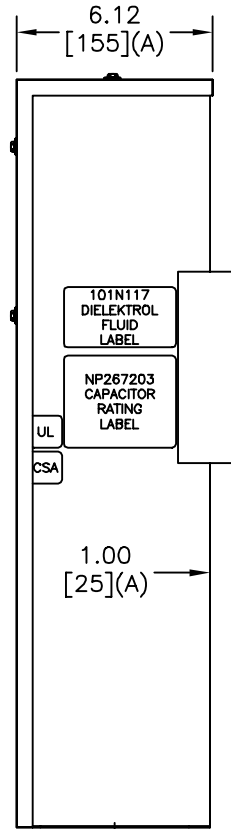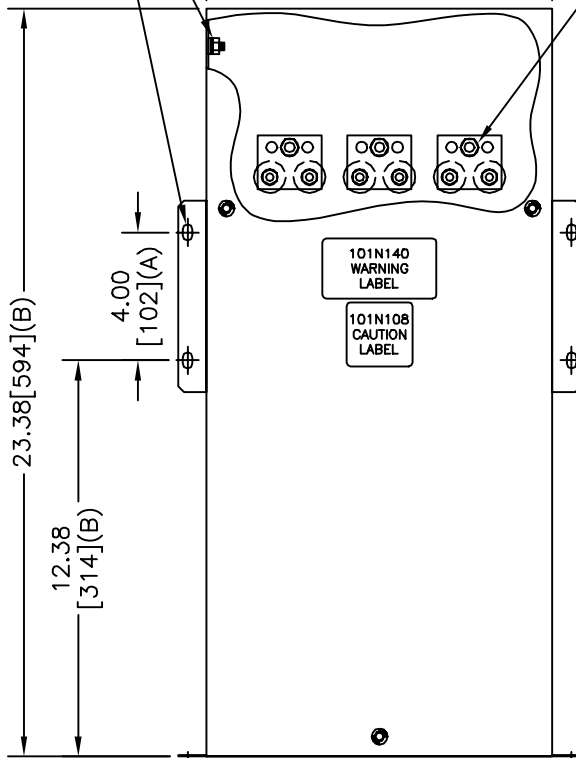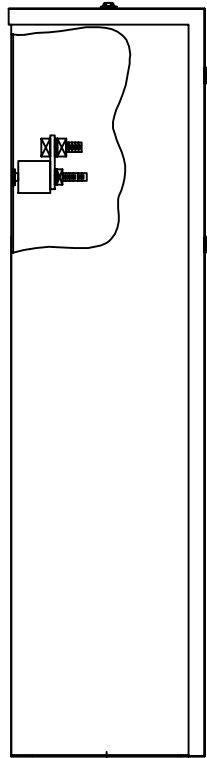

GE CAPACITOR

WITH INTERNAL DISCHARGE RESISTORS

CAT 65L822TL2 SN
42.5 KVAR 240V 60HZ 3PH

CONTAINS 0.49 GAL. COMBUSTIBLE LIQUID WITH LESS THAN ONE PART PER MILLION PCB ON MFG DATE MM/YYYY
CAUTION! BEFORE INSTALLING OR OPERATING READ GEH- 2738

NP267203 FORT EDWARD, N.Y. MADE IN U.S.A.

| TOL | +/- |
|-----|-----|
| A | .06 |
| B | .12 |
| C | .18 |
| D | .25 |

INDUSTRIAL SYSTEMS
FORT EDWARD, N.Y., U.S.A.

| | | | |
|--------|-----------|------|-----------|
| DRAWN | A.COZZENS | DATE | 7/10/2003 |
| ISSUED | | DATE | 7/16/2003 |

SIZE
A

SCALE

OUTLINE
65L822TL2

SHEET 2 CONT ON -

DISTR. TO