





SIZE A	DWG NO 65L825TZ2	SHT 2	REV
REV	DESCRIPTION	DATE	APPROVED

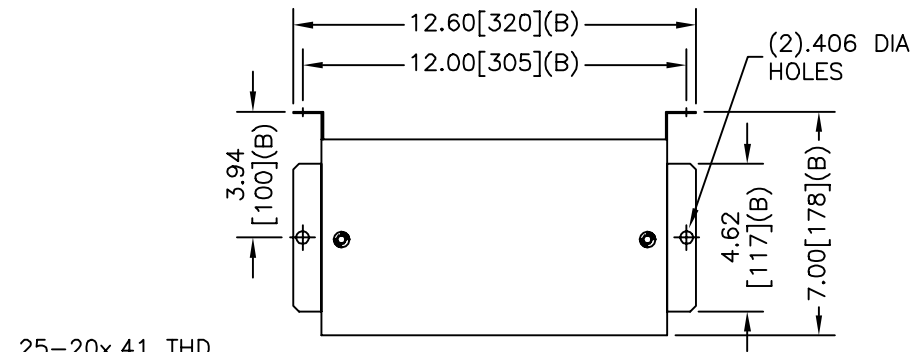


.25-20x.41 THD.  
FOR GRD. CONN.

(4).31x.50  
SLOTS

LINE TERM. FOR  
6-250MCM

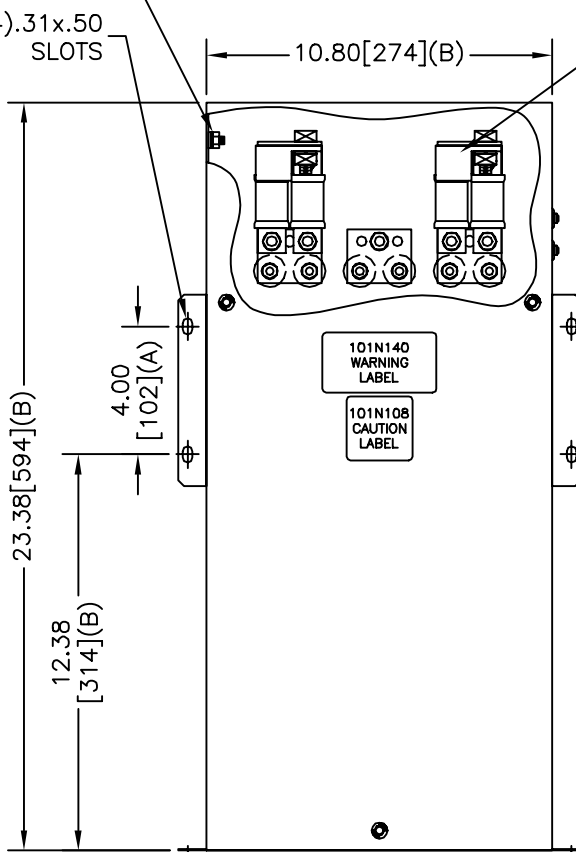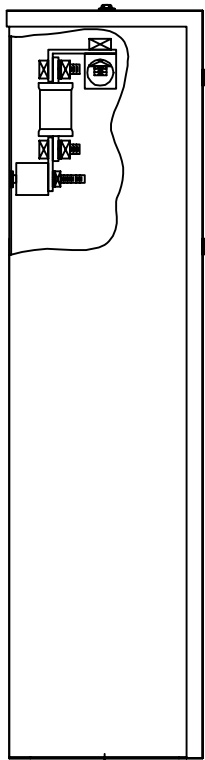

BLOWN FUSE  
INDICATING LIGHT

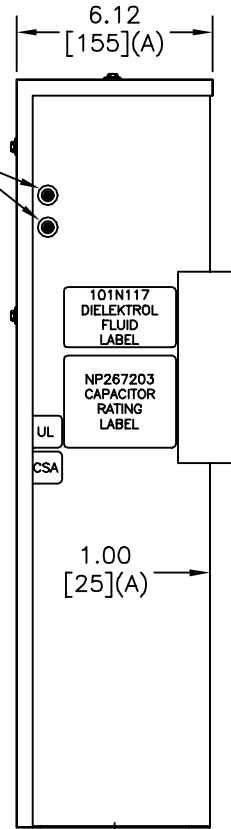

**GE CAPACITOR**

WITH INTERNAL DISCHARGE RESISTORS

CAT 65L825TZ2 SN  
50 KVAR 240V 60HZ 1PH

CONTAINS 0.39 GAL. COMBUSTIBLE LIQUID WITH LESS THAN ONE PART PER MILLION PCB ON MFG DATE MM/YYYY  
CAUTION! BEFORE INSTALLING OR OPERATING READ GEH- 2738

NP267203 FORT EDWARD, N.Y. MADE IN U.S.A.

TOL	+/-
A	.06
B	.12
C	.18
D	.25

**INDUSTRIAL SYSTEMS**  
FORT EDWARD, N.Y., U.S.A.

DRAWN B.Ross DATE 7/29/2003

ISSUED DATE 8/6/2003

SIZE  
A

SCALE

OUTLINE  
65L825TZ2

SHEET 2 CONT ON -

DISTR. TO