


SIZE A	DWG NO 65L830TK2	SHT 2	REV
REV	DESCRIPTION	DATE	APPROVED





.25-20x.41 THD.  
FOR GRD. CONN.

(4).31x.50  
SLOTS


.31-18x1.00 BOLT  
FOR LINE CONN.



SCHEMATIC DIAGRAM - 337

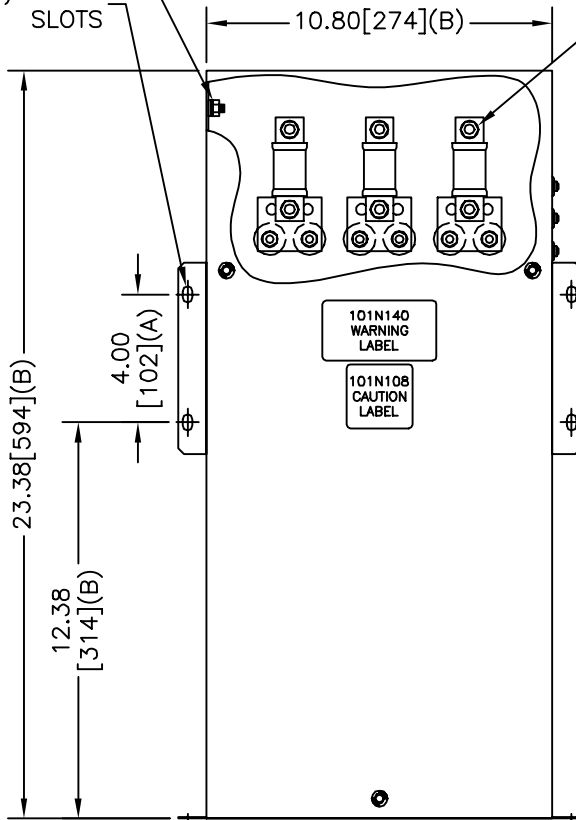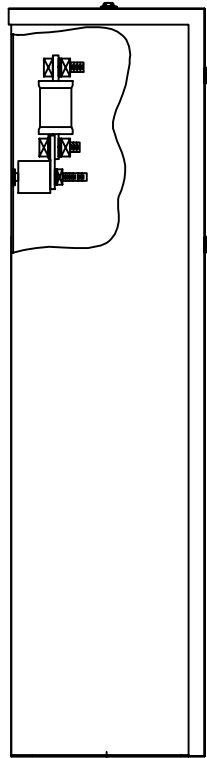

BLOWN FUSE  
INDICATING LIGHT

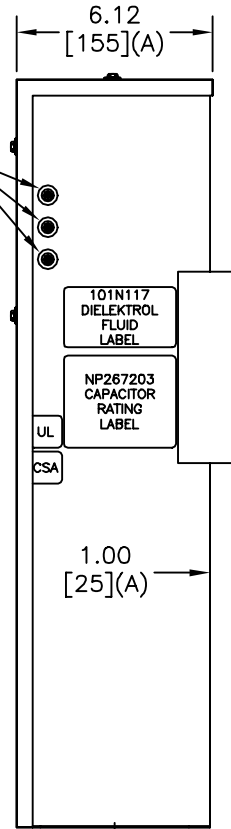

**GE CAPACITOR**

WITH INTERNAL DISCHARGE RESISTORS

CAT 65L830TK2 SN  
 75 KVAR 600V 60HZ 3PH

CONTAINS 0.32 GAL. COMBUSTIBLE LIQUID WITH LESS THAN ONE PART PER MILLION PCB ON MFG DATE MM/YYYY  
 CAUTION! BEFORE INSTALLING OR OPERATING READ GEH- 2738

NP267203 FORT EDWARD, N.Y. MADE IN U.S.A.

TOL	+/-
A	.06
B	.12
C	.18
D	.25

**INDUSTRIAL SYSTEMS**  
**FORT EDWARD, N.Y., U.S.A.**

DRAWN B.Ross DATE 5/13/2003  
 ISSUED DATE 5/14/2003

SIZE  
A

SCALE

OUTLINE  
 65L830TK2

SHEET 2 CONT ON -

DISTR. TO