



- NOTES:
- 1 ARRESTER PACKAGED FOR DOMESTIC SHIPMENT
 - 2 NET WEIGHT 65 LB
 - 3 MAXIMUM CONTINUOUS LINE TO GROUND OPERATING VOLTAGE, 5.1 KV RMS
 - 4 DIMENSIONS SUBJECT TO $\pm 3\%$ TOLERANCE
 - 5 DUTY CYCLE VOLTAGE RATING
 - 6 KV RMS

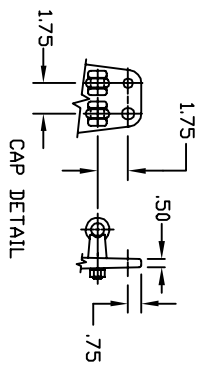

CLAMP TYPE LINE TERMINALS SUITABLE FOR USE WITH COPPER OR ALUMINUM CONDUCTOR .25 TO .81 DIA

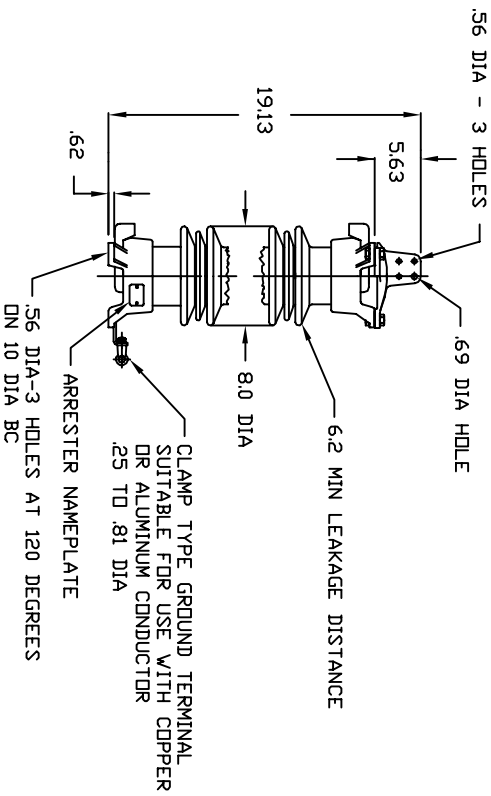

ANSI-70 GREY GLAZE
ALTITUDE TO 12000 FT

5 μ SEC 10KA IR KV	500 A SWITCHING SURGE IR KV	MAXIMUM 8/20 DISCHARGE VOLTAGE - KV AT					
		1.5 KA	3.0 KA	5 KA	10 KA	20 KA	40 KA
17.9	12.4	13.6	14.2	14.8	15.8	17.7	20.3

PART PORCELAIN STATION ARR		SCALE .06=1	
NAME 9L11ZGA006S			
DESIGN ALL	DATE 02/23/98	DWG S015320-00	REV. NO. 00
DRAWN JVR	DATE 02/23/98		

Approved 04-15-1998