



- NOTES:
- 1 ARRESTER PACKAGED FOR DOMESTIC SHIPMENT
 - 2 NET WEIGHT 66 LB
 - 3 MAXIMUM CONTINUOUS LINE TO GROUND OPERATING VOLTAGE, 8.4 KV RMS
 - 4 DIMENSIONS SUBJECT TO $\pm 3\%$ TOLERANCE
 - 5 PRESSURE RELIEF RATING 65 KA RMS
 - 6 DUTY CYCLE VOLTAGE RATING 10 KV RMS

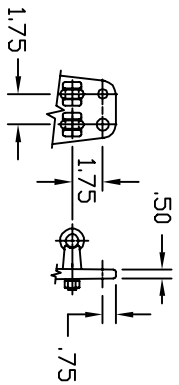

CLAMP TYPE LINE TERMINALS SUITABLE FOR USE WITH COPPER DR ALUMINUM CONDUCTOR .25 TO .81 DIA

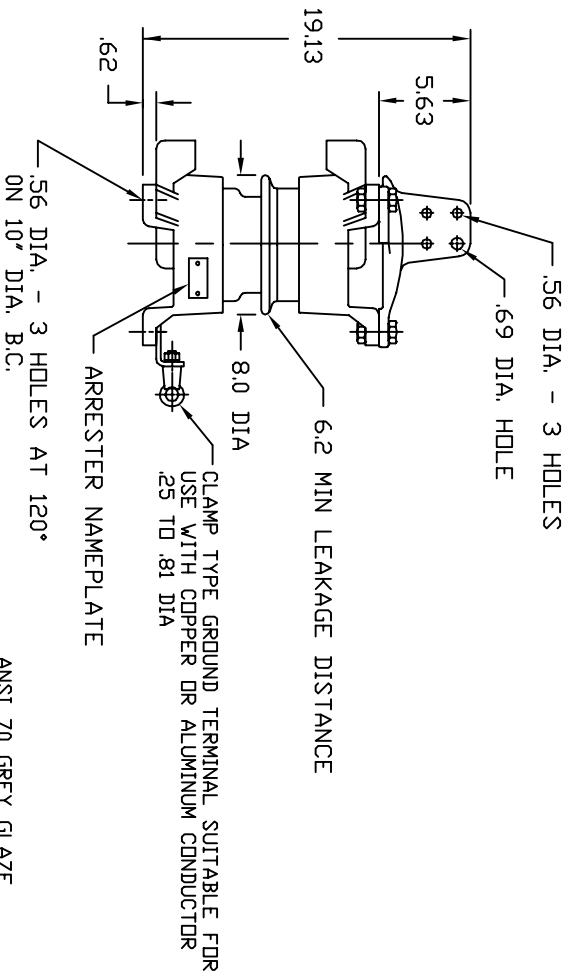

ANSI 70 GREY GLAZE
ALTITUDE TO 12,000 FT

5 μ SEC 10KA IR KV	500 A SWITCHING SURGE IR KV	MAXIMUM 8/20 DISCHARGE VOLTAGE - KV AT					
		1.5 KA	3.0 KA	5 KA	10 KA	20 KA	40 KA
29.3	20.3	22.2	23.3	24.2	25.9	29.1	33.3

PART PORCELAIN STATION ARR		SCALE 1:2=1	
NAME 9L11ZGA010S		REV. NO. 00	
DESIGN ALL	DATE 02/23/98	DWG. NO. S015324-00	
DRAWN JVR	DATE 02/23/98		