2913(Y)

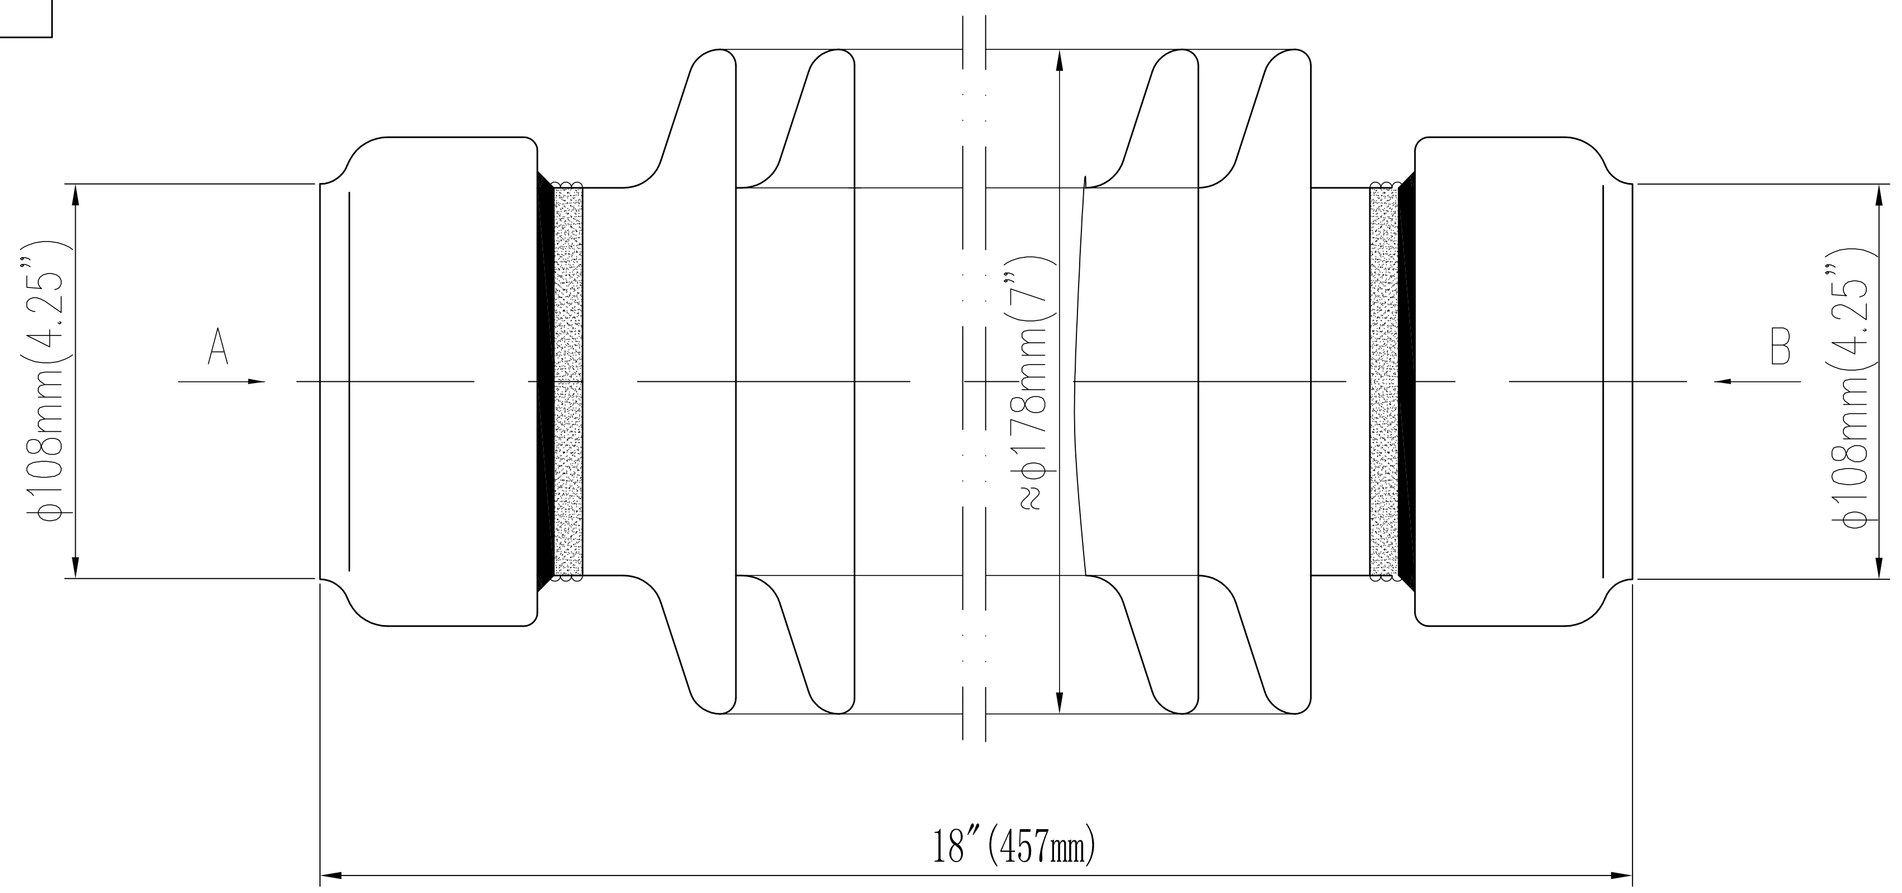

Characteristics:

Standard	ANSI C29.9 and C29.1
Leakage distance Inches(mm)	37"(940mm)
Cantilever strength (upright) Pound(KN)	2000 (8.9kN)
Tensile strength Pound(KN)	12000 (53.4kN)
Torsion strength Pound-inches (KNm)	10000 (1.129kN.m)
Compression strength Pound(KN)	15000 (66.75kN)
Voltage class kV	34.5
Impulse flashover positive kV	225
Wet power frequency withstand voltage 10sec kV	80
Lightning impulse withstand voltage kV	200
Test voltage rms. to ground Max. RIV microwave at 1000KHz	22 100
Net weight Pound/kg	37.5(17kg)
Flange material	Nordular case iron
Glazed color	ANSI 70 Gray

A、B 向

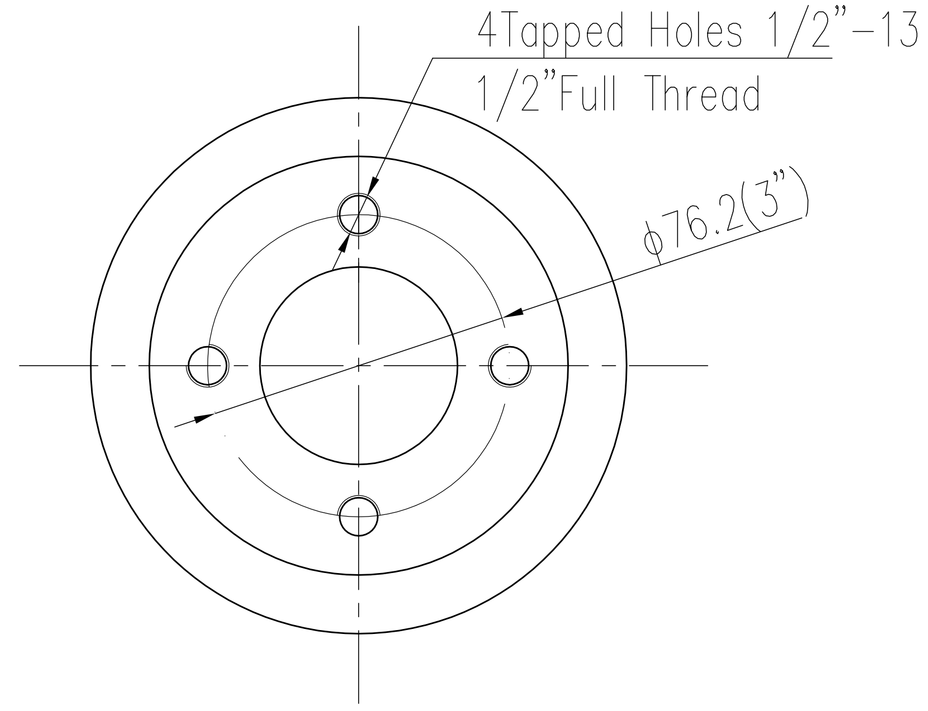

Rev01	5/16/2016			
		By	Date	
Designed				
Checked				
Approved				

Standard Drawing

Xian XD High Voltage Porcelain Insulator Co. Ltd.

TR210 Solid-Core Post Insulator

2913(Y)